


HIQ Home

User Manual v3.2.0

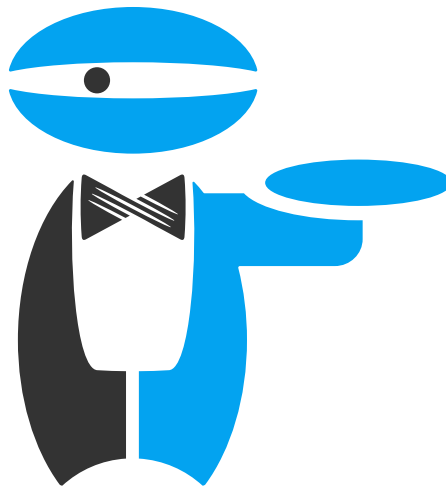

© 2012-2024 Robotina d.o.o.



Sales and management

Robotina d.o.o.
OIC-Hrpelje 38
6240 Kozina
Slovenia
+386 5 689 2020
info@robotina.com
www.robotina.com


Manufacturing and service

Cybrotech Ltd.
68 St Margarets Road, Edgware
Middlesex HA8 9UU
London
United Kingdom
info@cybrotech.com
www.cybrotech.com

Features

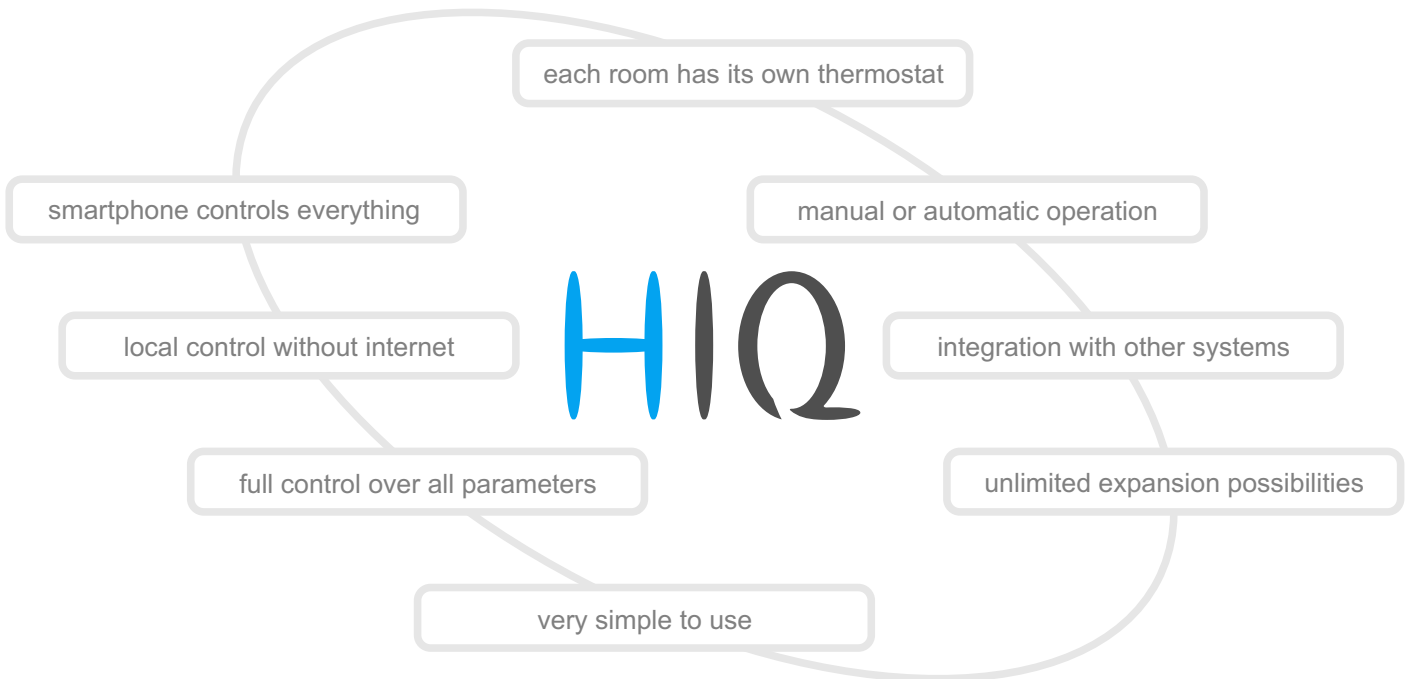


Multiple timetables

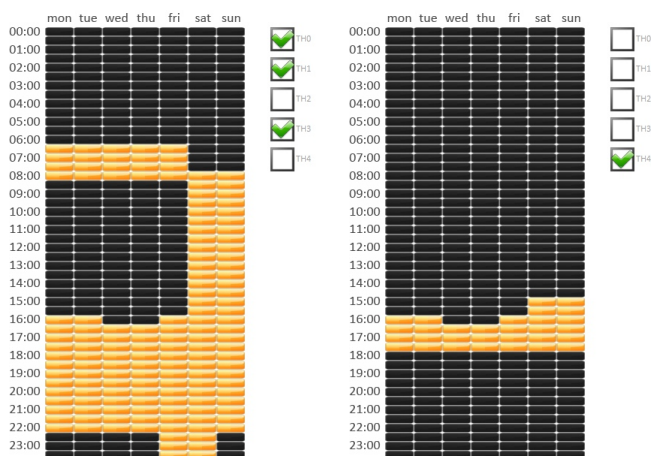

Things running up to your schedule. Select active hours, and devices to which they relate. Output can be manually overridden at any time.

Advanced RGB control

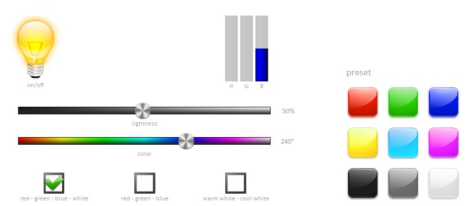


RGB mode allows control of hue, saturation and brightness; instead of individual red, green and blue channels.

White temperature mode goes between different shades of white, from cool daylight to warm incandescent tone.

Evo light synchronize light temperature with time of the day. At the evening, lights will smoothly slide into a warmer, cosy tone.

Connections

HIQ devices

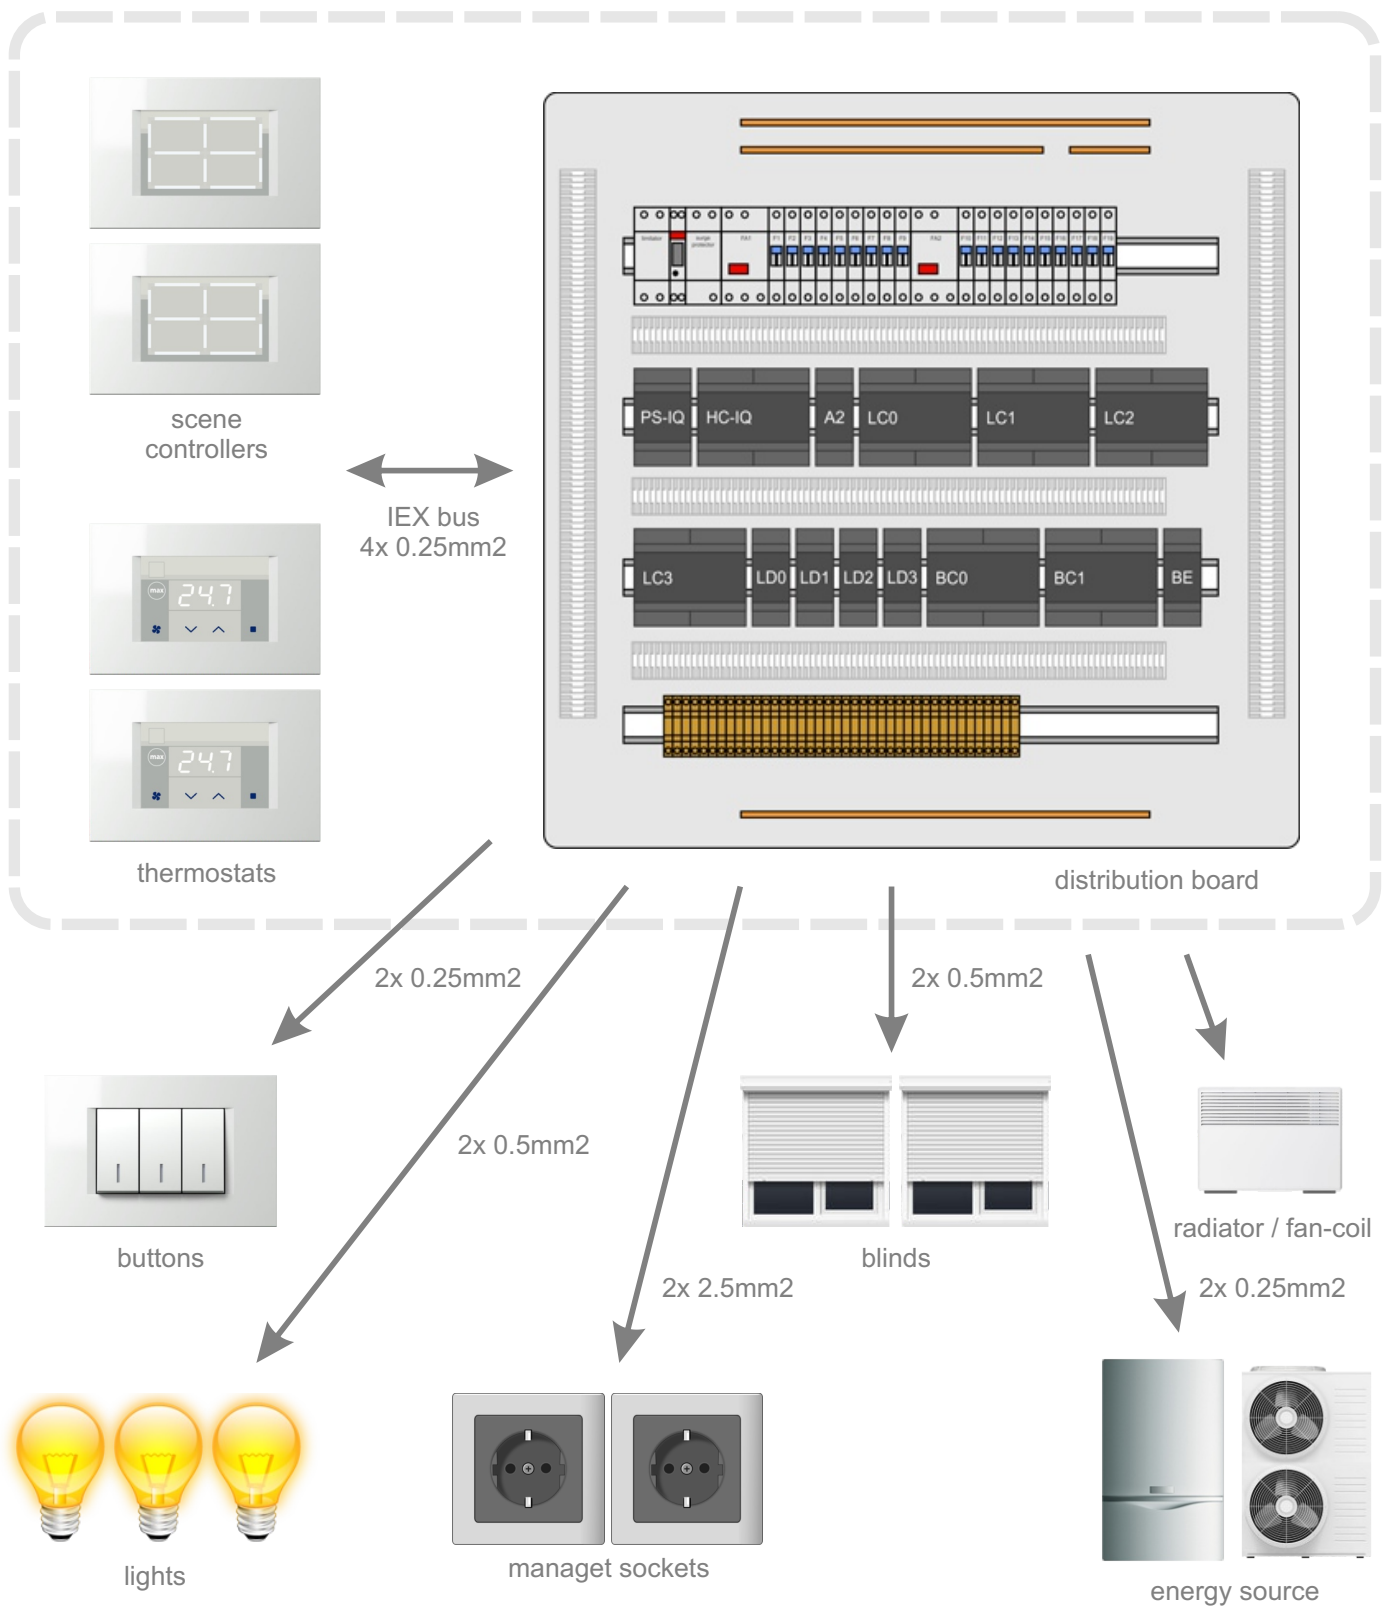

Devices

what can be connected to HIQ devices


Device	Used for
	<p>HC-IQ master controller</p> <p>smartphone and PC connection, automation, timetable, alarm, energy and other functions</p>
	 <p>LC-10-IQ light controller</p> <p>LED and halogen downlighters, all kinds of general-purpose lights</p>
	 <p>LD-D8-IQ DALI dimmer</p> <p>managed sockets for floor lamp, table fan, hi-fi system, projector, or any other electrical device</p>
	 <p>LD-V4-IQ LED dimmer</p> <p>dimmable lights of any kind</p>
	 <p>LD-P4-IQ universal dimmer</p> <p>LED stripes 12V or 24V</p>
	 <p>BC-5-IQ blinds controller</p> <p>blinds powered by a standard 230V up/down motor</p>
	<p>SC-4T-IQ scene controller</p> <p>single click to set desired lighting and blind configuration</p>
	 <p>TH-1-IQ TH-2-IQ electronic thermostat</p> <p>heating, cooling and fan control</p>
	 <p>FC-1-IQ fan-coil controller</p>

Tech bits

the experience behind the product

Design

Cybrotech originate from process industry, devices are designed and build to a much higher standards then is usual in home automation.



Hardware features

- hardware watch-dog
- transient supression
- short circuit tolerant outputs
- reverse polarity tolerant supply
- wide temperature range
- very long life expectancy

Addressing

Once connected, devices are automatically recognized, categorized and connected to each other. No user intervention is required.

Response

From keypress to action, typical reaction time is about 10ms. That instills a sense of presence and connection.



Firmware update

All devices are build to implement firmware upgrade, so the future for your investment is assured. Update is never forced.

Power consumption

HIQ system take a great care to use as little energy as possible.

CAN bus is a multi-master, deterministic bus which offer optimum between performance, network architecture and cost.

No batteries

The whole system is operated from a single 24V power supply.



No hidden costs

What you see is what you get, there are no subscriptions, monthly fees or hidden costs

Programming tools are free, everybody is welcome to give it a try. Basic programming skills are needed. Join our group and discover how fun and simple house automation can be.


Wired vs. wireless

- no batteries
- more reliable
- faster response
- less EMI pollution
- simple setup
- lower price

We don't sell switches, luminaries, computers, portable devices, tablets or phones; you have a freedom to select anything you like. What we do sell is electronics, software and home automation experience at it's finest.

Lights and blinds

control anything from anywhere

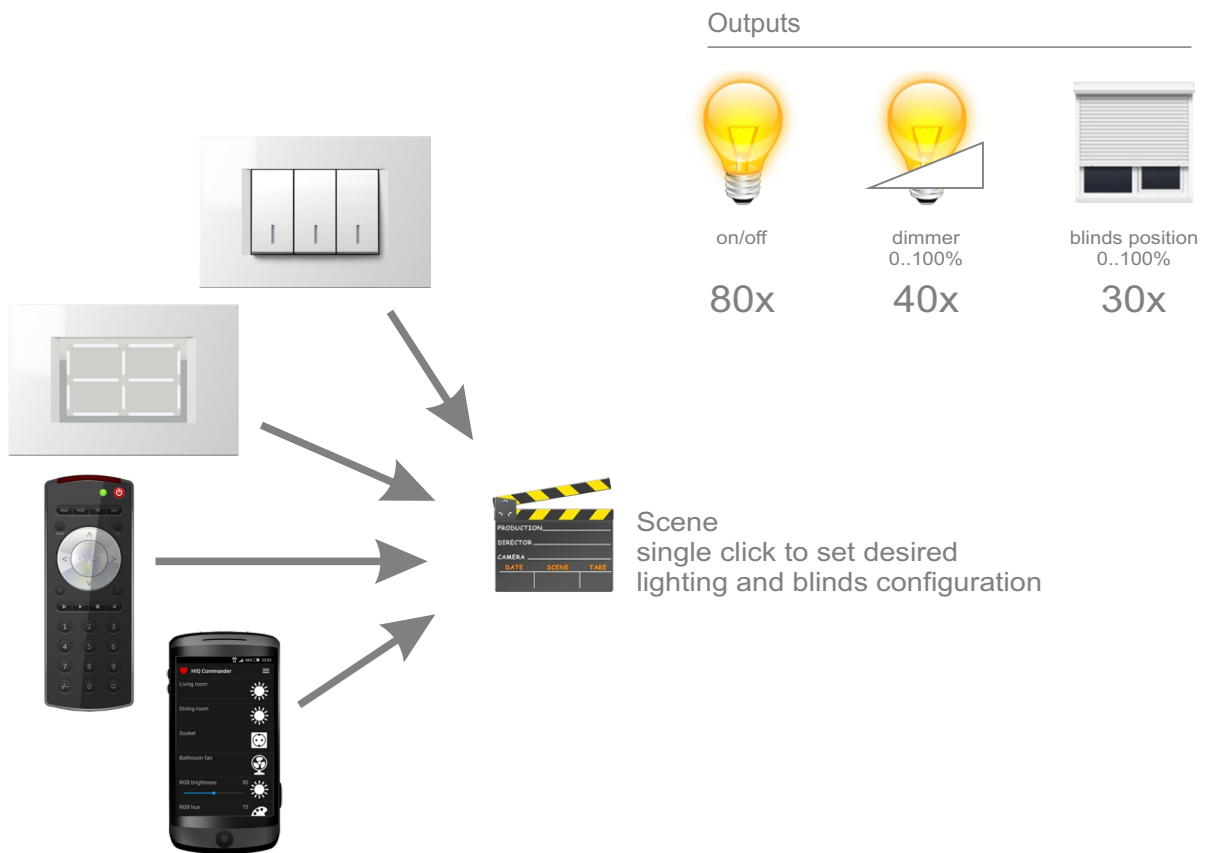

Light type



incandescent/halogen



compact fluorescent



compact LED E27/E14



LED strip 12/24V

Blinds type




classic blinds



slatted blinds



Roman shades



managed socket for a floor lamp, table fan, dehumidifier, electric mosquito repellent, hi-fi system




blinds control with an intermediate position

RGB dimmer


hue, saturation and brightness

In RGB mode, dimmer channels are connected to red, green, blue and white lights. White channel is optional. Instead of individual channels, user controls total brightness, hue and saturation.

RGB dimmer may be used in white temperature mode. Here, user controls brightness and white temperature. White light is obtained by mixing all four channels. For best result, use white strip 2700K (warm white) and RGB strip 5600K (cool white).

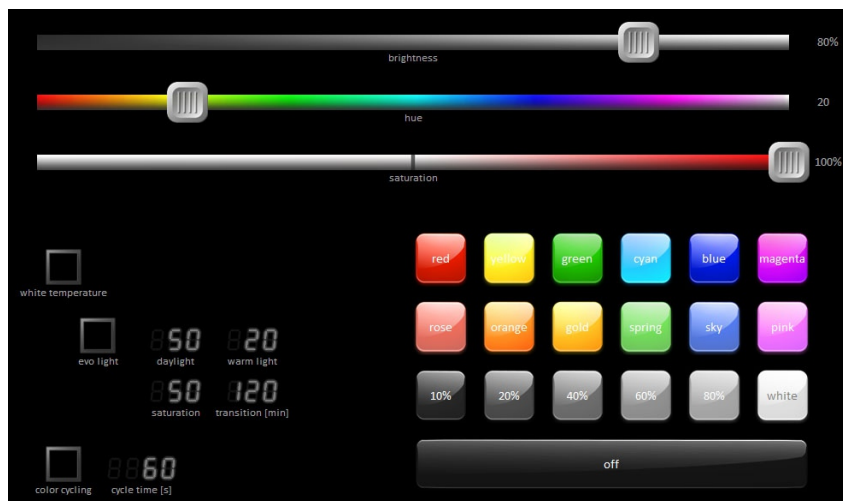


White temperature

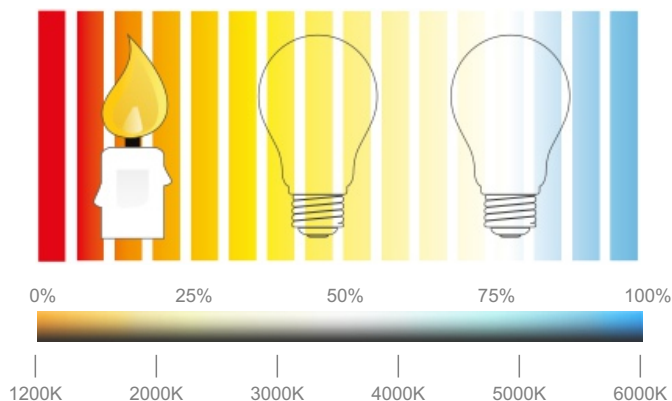

In RGB mode, saturation goes from white to selected color (0..100%). In white temperature mode, saturation goes from natural white (white strip) to selected white (0..100%).

Color picker

Color picker is a quick way to choose a color, available with the HIQ Commander application. To control the RGB, just touch a color or slide finger over the screen.

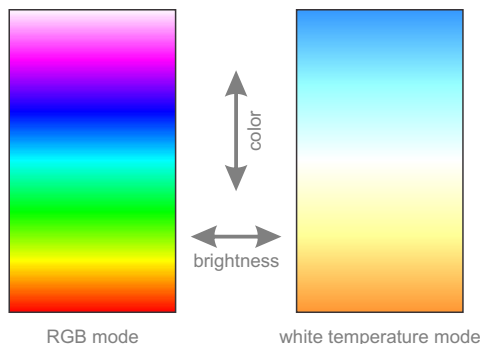

Color cycling

Automatically rotate through the available colors. Brightness and saturation are selected manually.




Scene



one button to rule them all



Scene is a user-defined memory to control lights, dimmers and blinds. Each output can be on, off or not affected by the scene.

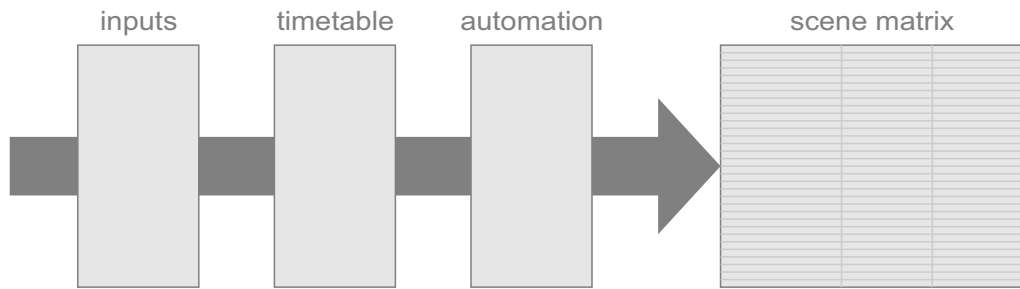

Scene mapping

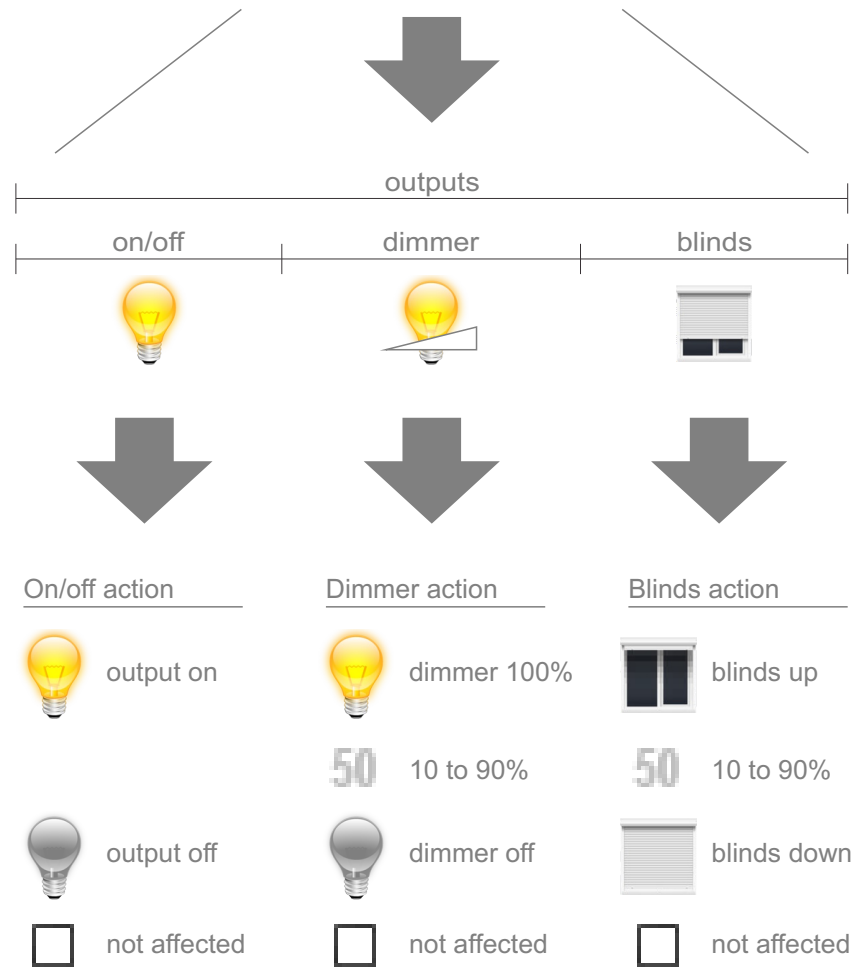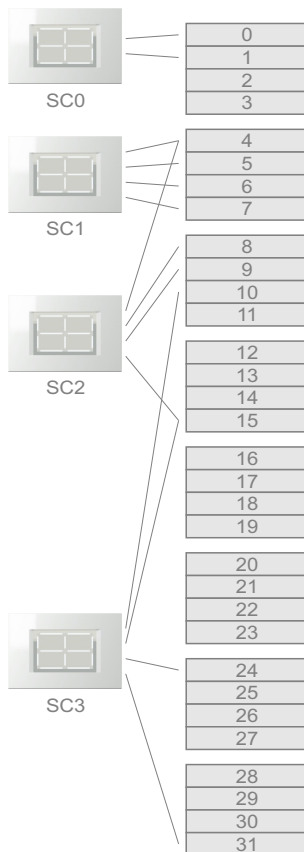

Each controller can control one to four scenes. Each scene number is configurable.

How to set a new scene


1. Identify lights that will be controlled by the scene

Using HIQ Configurator




Open Lights+blinds page, check the output number

Using HIQ Commander



Press and hold until pop-up dialog appears, Information

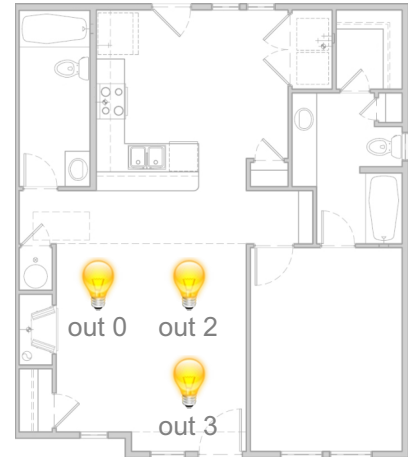

2. Open HIQ Configurator / Scene editor and set the corresponding outputs


Scene	0	1	2	3	4	5	6	7
0	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2		<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Lights

This procedure does two things: select which outputs are affected, and what to do with each output (on, off).


How to change a scene

Using HIQ Configurator




Open Scene editor and set the corresponding outputs

Using HIQ Commander



Press and hold scene button, then select Memorize

Using Scene controller



Press and hold a button, until you hear a short beep

This procedure does not change which outputs are affected, only what each output does (on, off).

Automatic lights

where and how to use automatic lights

HIQ system offers several ways to automate lights. The appropriate configuration is selected based on the way how the space is intended to be used.



Smart light is based on presence and low light signal. It is used for living room and it can be combined with evo light.

Ready light take advantage of motion and door sensors. It is suitable for occasionally used spaces, such as bathroom.

Motion sensor automation cover hallway, stairs and porch. Light goes off after timeout.

Door sensor cover small rooms used temporary, like a closet, cloak or wardrobe.

Other areas, like a bedroom, can't be automated and must be handled manually.

Input and output mode

configuring the light controller

usage	input mode	output mode	function	device
on/off			press on, press off	
on/off + timer			press on, press off when timer expires, light goes off	
staircase			press on press again to reload the timer when timer expires, light goes off	
doorbell			press on, release off	
scene			press to set multiple lights press again to turn everything off	
motion sensor			movement is keeping the light on when timer expires, light goes off	
			movement is keeping the light on when timer expires, light goes off active only during the night	
door sensor			open door to turn the light on close door to turn the light off	
			open door to turn the light on close door to turn the light off active only during the night	
no operation			input does not directly affect the output, but it may be used for other functions within the system, like ready light	


Ready light

advanced automatic light control

Ready light is an advanced lighting system, based on motion and door sensors. Best suited for spaces that are used from time to time, such as a bathroom or study.

Features:

- comes on as instantly when door begins to open
- never goes off while people are inside the room
- quickly shuts down when all the people are out

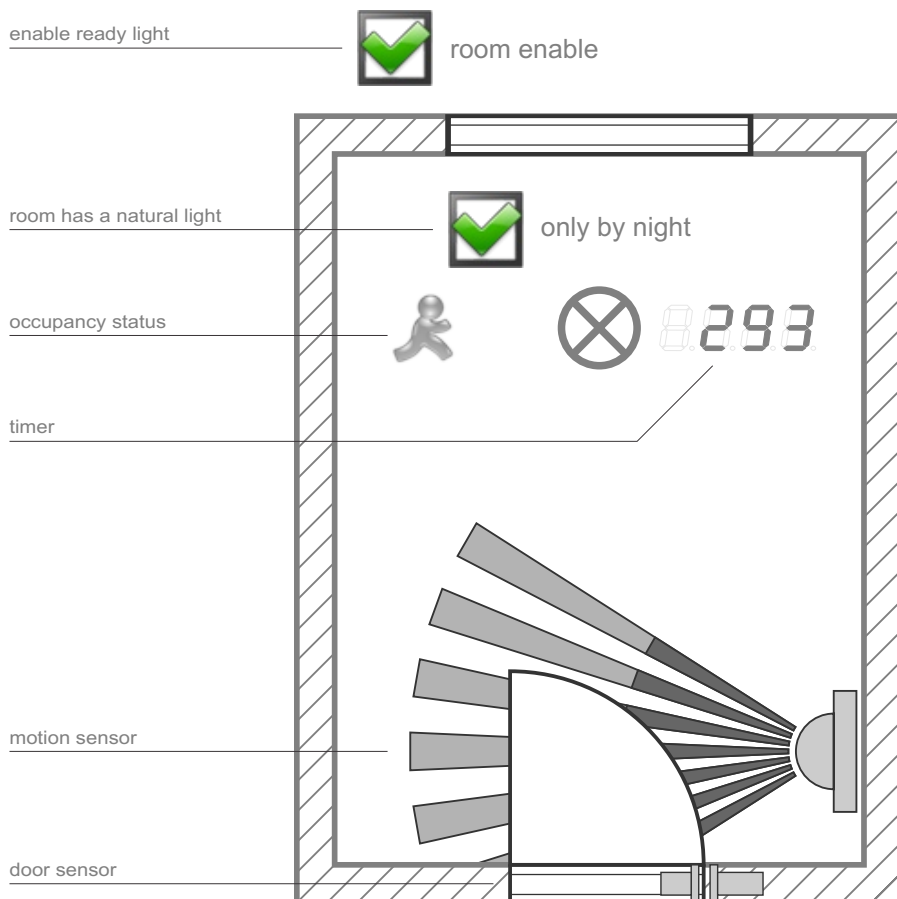

Input setup

Sensors are connected to spare inputs of light controller. Input must be configured to ready light mode.

Sensor placement


For a best result, sensor must be activated just after person closes the door.

Short timeout

Time from closing the door to light off. If time is too short, light may turn off after entering the room.

Long timeout

Time from leaving the room to light off, without closing the door.

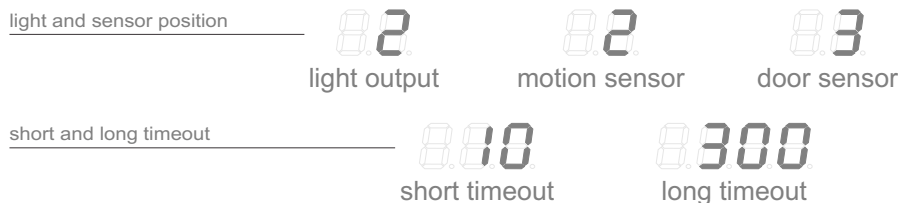

Patent rights granted
2016-04-29 by patent
office Slovenia, number
24867, class G06F 9/00.

How does it work

When door begins to open, sensor is activated and the light turns on. When a person enters the room and closes the door, the activation of the motion sensor means that there is undoubtedly someone in the room. As long as the door is closed, the light will stay on. When person leaves the room and closes the door, system will wait for a short time, and then turn off the light. If the door is left open, long timeout is active. If the motion sensor is not activated during that time, the light turns off.


Evo light

automatic transition to warm evening lights

Evo light is a half-automatic system for controlling light temperature. It uses RGB dimmer in white temperature mode. Brightness is controlled by user, hue and saturation are controlled by the system.


During the selected period, lights are going from a cool white to warm white, perfectly matching our natural daily cycle.

System can be combined with smart lights. In that case, operation is fully automatic, smart lights control brightness, and evo light control light temperature.

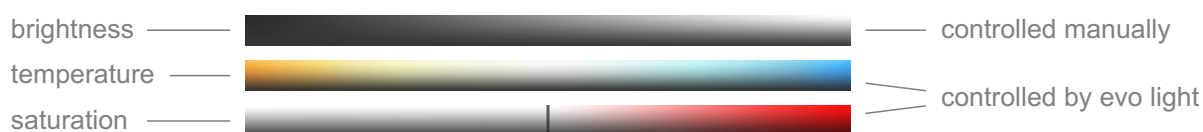

Term evo is a short for 'evolution'. During the most of our evolutionary past, our ancestors were using no artificial lighting, so daily rhythm was synchronized by sunlight. Evo light is an attempt to mimic that natural conditions.

Operation

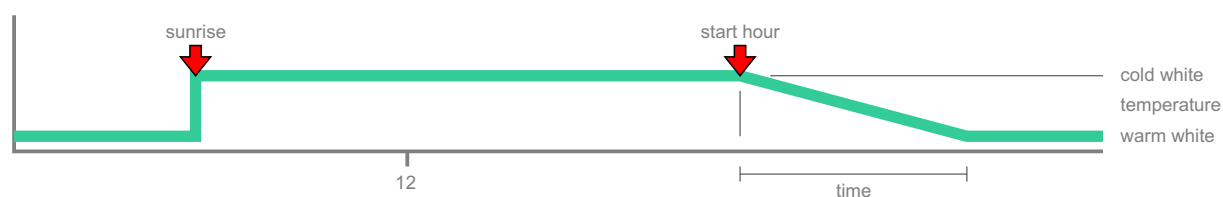

To configure evo light, first experimentally find the best light for early and late evening. Start hour and transition time should be configured so the warm light is reached at least one hour before bedtime.


When dimmer is switched back to RGB mode, evo light will automatically stop. Enabling again, it will catch on correctly, recalculating the new parameters.

Note: evo light setup is located on RGB page.


Heating and cooling

general features of heating/cooling system

Heating/cooling



Energy demand

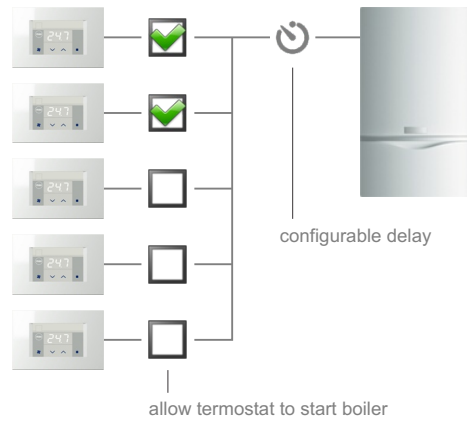


Up to five regulation zones are supported, each with their own thermostat. Generally, energy comes from boiler for heating and chiller for cooling, but other combinations are possible.

Thermostat



TH-1-IQ



TH-2-IQ

Actuator




hot water radiator



electric radiator



electric fan heater



floor heating



air condition



fan-coil convector

direct

external 16A relay


fan coil actuator

System is versatile enough to handle most actuator options. Hot water valve is connected directly, others require either external power relay, or fan coil actuator. Different actuator types can be mixed.


Examples




air condition heating and cooling



radiator heating, air condition cooling




fan coil heating and cooling




electric heating

Timetable


weekly event scheduler

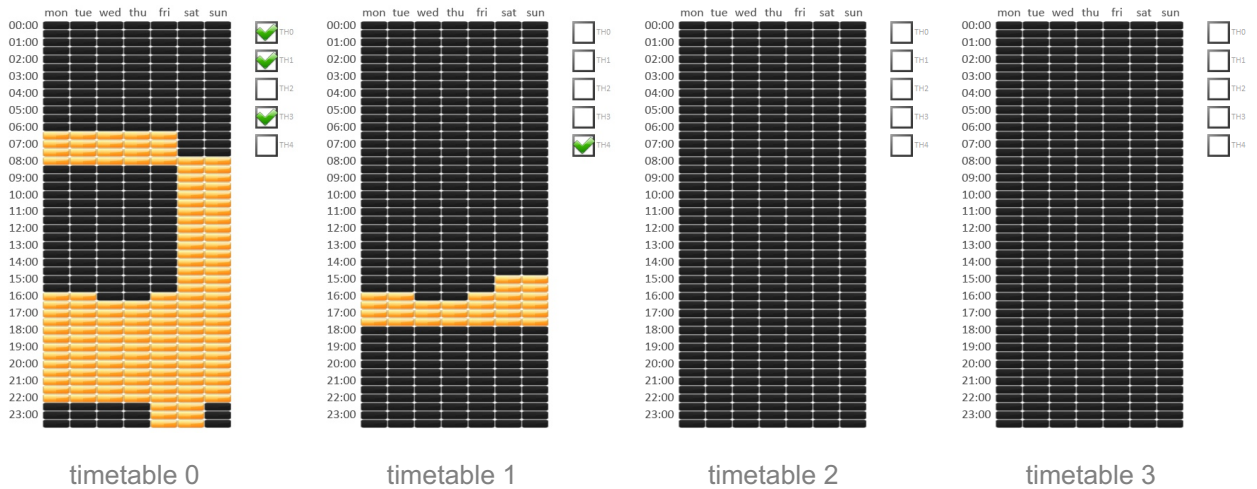


Selected part is a period when heating system is active. Each rectangle represents a half hour. Tables are fully independent of each other. To set multiple fields, hold left button and drag mouse. Each timetable can directly control one output or apply a scene.




Each block create on and off event.

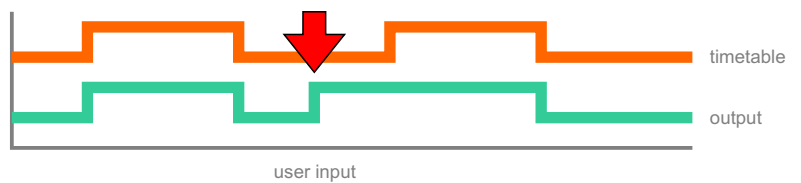

When timetable controls an output, manual override is possible at any time, timetable will catch on with the next transition.

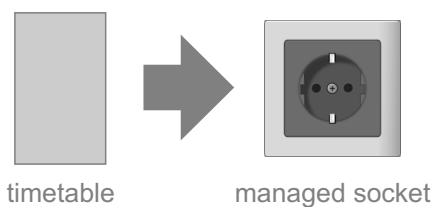



Timetable can be used to control mostly anything. Use a managed socket to create a time plan for your devices.



The list of holidays can be added to the timetable. On a holliday, timetable is running as it is Sunday.

Presence and low light

automation based on reliable data

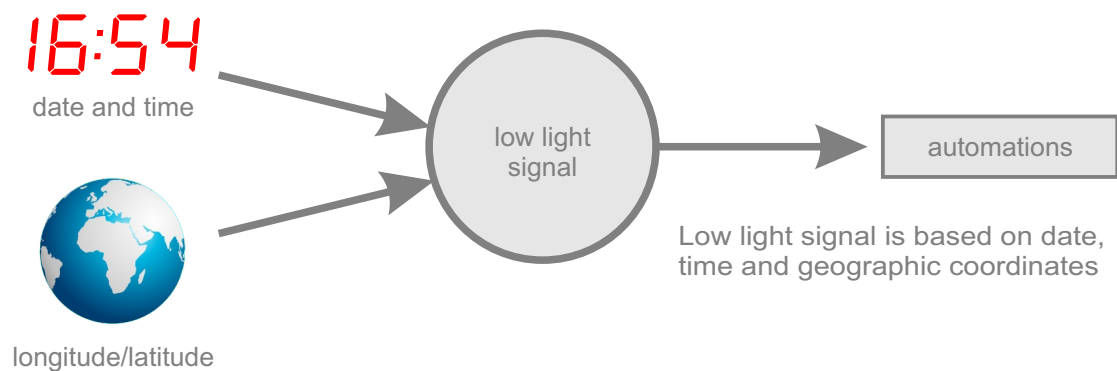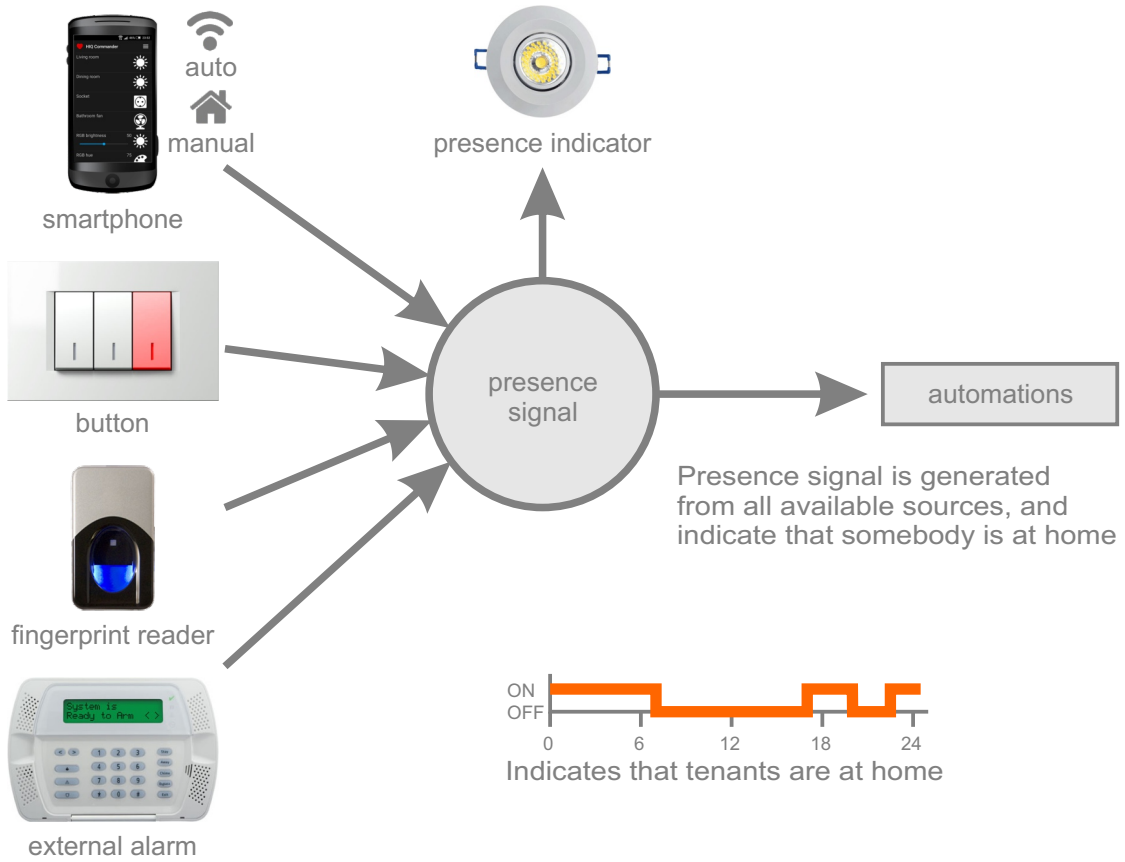

Automation

execute tasks automatically



Coming home

Let your house show how happy it is when you come back home. When phone connects to your wi-fi network, lights and heating will turn on automatically.



Default setpoint

When active, any setpoint adjustment is valid for about half hour, then it returns to the temperature defined in automation setup.



Leaving home

When you leave the house, smartphone disconnects from home wi-fi network, a few minutes later system will turn lights and heating off.



Bio offset

Following your natural biological rhythm (chronotype), let the house be a little warmer (or cooler) at the specified time of the day.



Smart lights

In the evening hours, when sunlight goes down, automatically set evening scene, turn on the lights and lower blinds. Works only when tenants are at home.



Comfort wake up

System will turn thermostat on a predefined number of minutes before smartphone rings, whenever you set the alarm.



Random lights

When nobody is at home, discourage snooping with a simple deception: turn lights on and off to leave impression that house is not empty.




Sunny wake up

Wake up naturally, by gradually lifting blinds and let the sunlight wake you up, a predefined number of minutes before smartphone alarm.


The most frequent complaint about home automation is - how to turn the damn thing off. However, regardless the inglorious reputation of smart machines, we strongly believe HIQ will gradually grow up into your daily routine. Events are generated automatically, you are in charge to assign actions according to your preferences.

Coming home

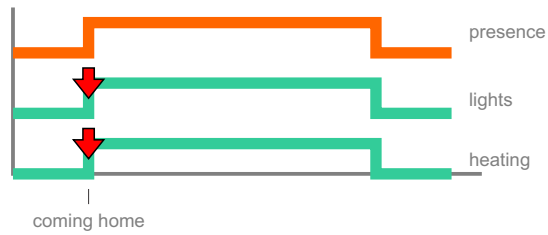


Use presence signal to set the scene and turn the heating on.

Leaving home

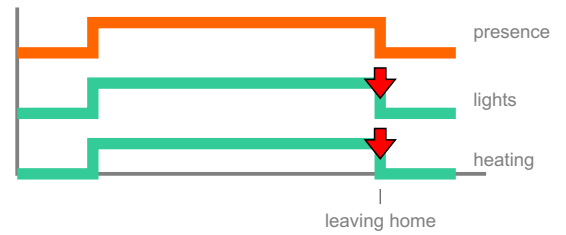


Use presence signal to turn the lights and heating off.

Smart lights

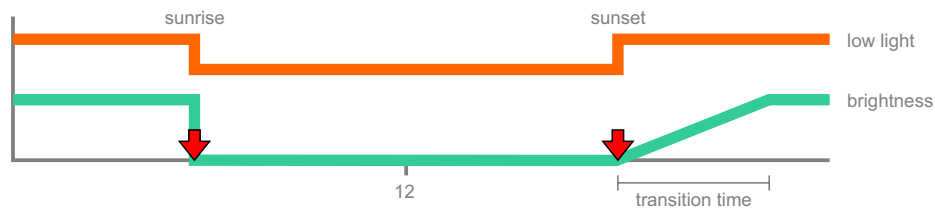


Automatic lights with an optional slope control, synchronized with the low light signal. Smart lights are also dependent on presence signal.

Random lights

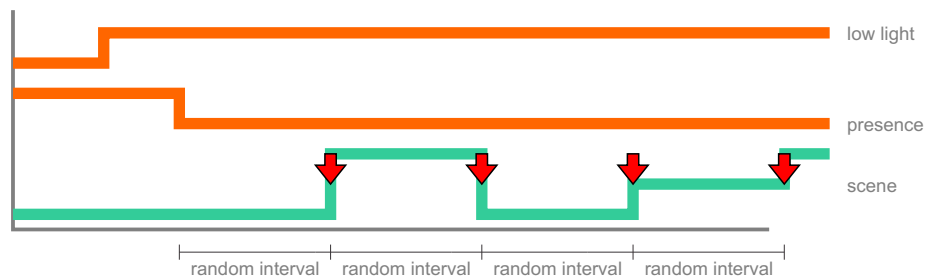


Turn the lights on and off to leave the impression that house is not empty, to discourage burglars.

Comfort wake up

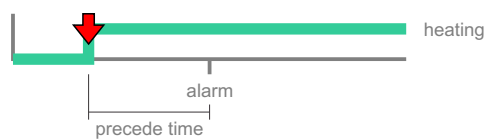


Turn the heating on a few minutes before the phone starts ringing.

Default setpoint

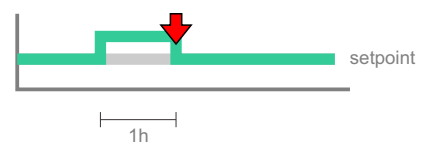


When setpoint is adjusted manually, one hour later it will return to predefined value.

Sunny wake up

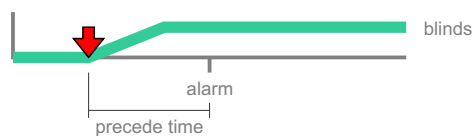

Lift the blinds up a few minutes before the phone starts ringing.


Bio offset

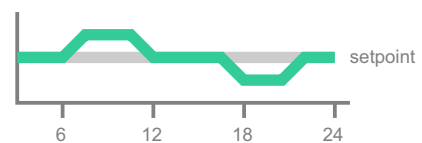

Small temperature correction depending on time of the day. Adjustable up or down.

Alarm

a few clicks to security

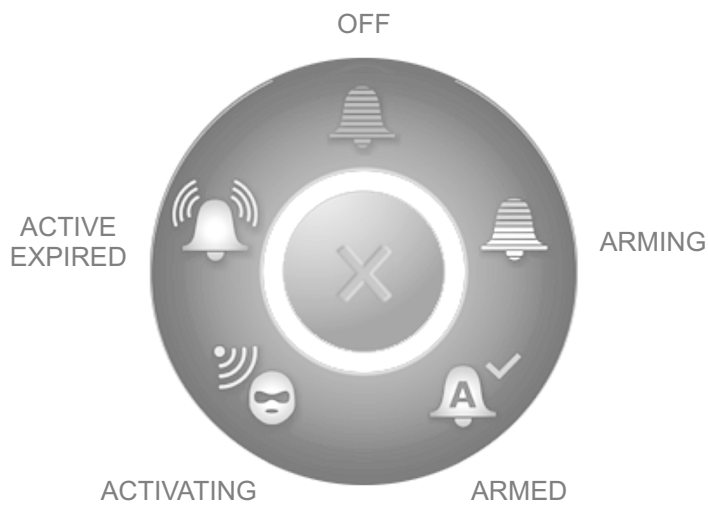

OFF	alarm inactive
ARMING	alarm turned on and will be armed when time expires (default 30s)
ARMED	alarm ready, no intrusion
ACTIVATING	sensor activated, alarm has to be turned off before delay time expires (default 30s)
ACTIVE	burglary, siren output active
EXPIRED	delay time expired, siren is turned off (default 120s)

Alarm on/off


- longpress on a selected wall switch
- smartphone using HIQ Commander
- smartphone by connecting to wi-fi (Android only)
- PC with HIQ Configurator
- PC with HIQ Configurator and 4-digit code
- automatically with presence signal

On/off indicator

- small light connected to an output
- blinking of a selected light
- smartphone with HIQ Commander
- PC with HIQ Configurator

Zone covering example

- zone 0 - house exterior
- zone 1 - ground floor, living area
- zone 2 - first floor, sleeping area



zone 0
residents at home
minimum security



zone 0+1
residents sleeping
partial security



zone 0+1+2
residents away
full security


Energy

electricity measurement


Energy monitoring is the first step to efficient energy usage. Once knowing how much energy something is using, one can make a rational strategy for saving.

Required hardware

SDM-120C power meter
CAD-232-A2 converter



Energy consumption in last 60 minutes [W]

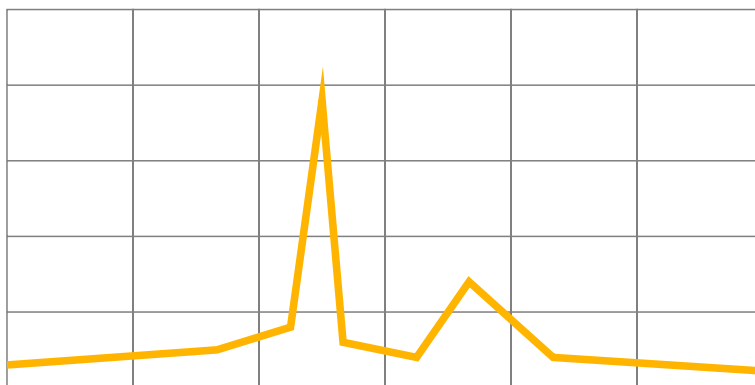

Graph for last hour is a quick way to check consumption profile.

Energy by output

Power count - a number how many times the output is turned on.

Working hours - total number of hours the output spent in on state.

Nominal power - output power configured by user. It can be measured by resettable power meter, or read from the label.

Current power - output power at the current moment.

Energy today - total energy used from last midnight, expressed in Watt-hours.

Energy total - total energy consumed by the specific output.

How to measure device power


1. Turn the output off.
2. Reset relative power.
3. Turn the output on.

A few seconds later, measured relative power is displayed. If the reading is not stable, temporary turn off any load which may consume variable amount of power.

Measured rating may be used to set the nominal power on 'By output' page.

Customization

get the maximum out of your system



integrated development environment

The goal of customization is to add functionality related to some specific needs. HIQ system is flexible and open for all kinds of modifications. This page will give a short overview how to start with modifications.

Customization is for the one who wants to get the maximum out of the system. It requires a basic programming skills. Programming language is «structured text», a kind of simplified Pascal. Development environment (editor, compiler, on-line monitor) is called CyPro, and it is free to download from the company web site.

standard HIQ system



custom program



custom devices

Modify HIQ program

- load program source directly from controller
- put your code into custom_algo module
- send modified program back to controller

Combine HIQ and non-HIQ modules

- all HIQ modules are fully IEX compatible
- delete unused HIQ modules from hardware setup
- add your own selection of IEX modules
- modify program according to your needs

HIQ Commander for non-HIQ applications

- allocate variables for autodetection manually
- use allocated variables in your cybro application
- check Cypro example HiqCommanderDemo

Non-standard HIQ configuration

- custom selection of modules, e.g. 10x LC-10-IQ
- hardware setup, manually add new modules
- adjust program and mini scada up to your needs

Modify HIQ Mini View for your house

- no special tools are needed
- configuration consist of one text file and images
- use Notepad to change configuration file
- use an image editor to create custom graphics

Connect HIQ systems together

- create system as big as you like
- use sockets as a link between controllers
- implement all kinds of commands

Example

Task: add counter how many times light is switched on

1. CyPro

- allocate variable lc00_qx00_count, make it retentive
- add the following lines of code into program
- send program to controller

2. Mini scada

- open CyBroMiniView.xml in text editor (Notepad)
- add object to xml configuration, inside the first page
- use scada (ctrl-E) to move object to the right place

246



```
if fp(lc00_qx00) then
  lc00_qx00_count:=lc00_qx00_count+1;
end_if;
```


```
<object>
  <type>led</type>
  <var>c1000.lc00_qx00_counter</var>
  <digits>4</digits>
  <decimals>0</decimals>
  <zeroblanking>1</zeroblanking>
  <sign>0</sign>
  <ledcolor>$FF0000</ledcolor>
  <height>42</height>
  <x>100</x>
  <y>100</y>
</object>
```

HIQ Configurator

system setup and configuration



Install

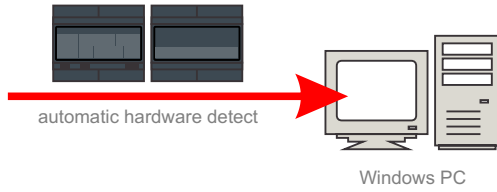

Package content



HIQ Configurator

- control center
- system configuration
- diagnostics and repair



HIQ Timeplot

- temperature timeplot
- consumption timeplot
- 1080p screen required


System configuration

- output timer
- input mode
- blinds travel time and intermediate position
- graphical scene editor
- ready light
- alarm
- heating and cooling
- timetable
- automation

System limits


1x		HC-IQ main controller	one central controller
8x		LC-10-IQ light controller	80 on/off outputs
4x		LD-V4-IQ LED dimmer	40 dimmer channels
or		LD-P4-IQ universal dimmer	
4x		LD-D8-IQ DALI dimmer	
2x		LD-D8-IQ DALI dimmer	
6x		BC-5-IQ blinds controller	30 blinds
4x		SC-4-IQ scene controller	16 scenes
6x		TH-1-IQ thermostat	6 regulation zones
6x		FC-1-IQ fan-coil controller	

Autodetect



To select a controller to work with, use Autodetect function.

Autoaddress

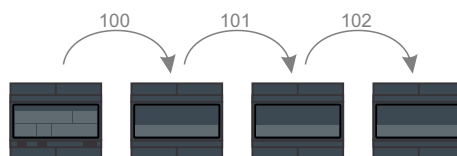



To get modules address in right order, use Autoaddress.

Rename


- ctrl-E - edit mode
- right click - rename
- ctrl-E - return to normal mode

HIQ Commander

smartphone app

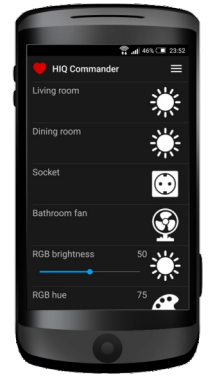

Autodetect devices

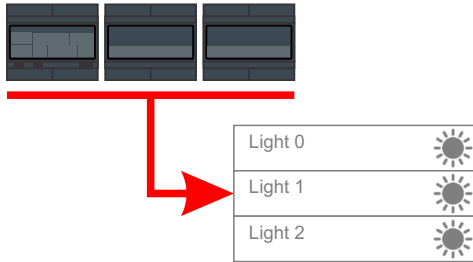


Autodetect must run in local network. If internet is available, configuration automatically registers on HIQ Home server, enabling remote access.


Rename




Change icon

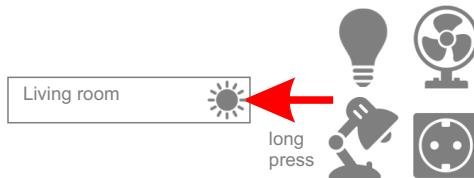


Remove



Rearrange

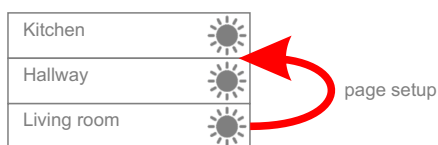

Copy configuration to another phone

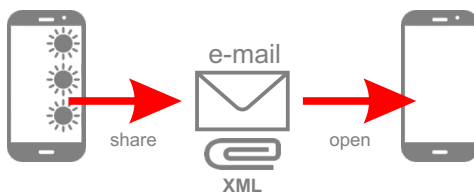

- click Share
- click share icon
- select your mail application
- enter recipient, send email

- open received email
- click the attachment
- when asked, select HIQ Commander
- click OK to accept new configuration

Features



- direct control for lights
- direct control for blinds
- direct control for thermostats
- coming home leaving home
- warm wake up sunny wake up
- smart lights random lights
- default setpoint bio offset
- export configuration to another phone

+	+
+	+
+	+
+	×
+	×
+	+
+	+
+	+

Application limits


HIQ Commander can handle more devices than what is limited by the system:

- 10x LC
- 10x LD
- 10x BC
- 10x TH


Additional devices may be used in custom projects.

HIQ Universe

cloud access and management




Local and internet connection

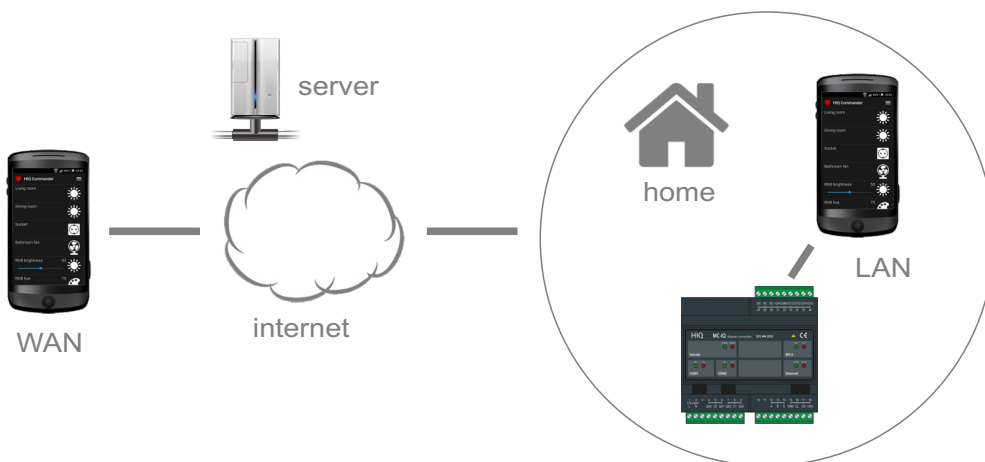


LAN / WAN switching is fully automatic. Number of phones is not limited.

Remote access and management

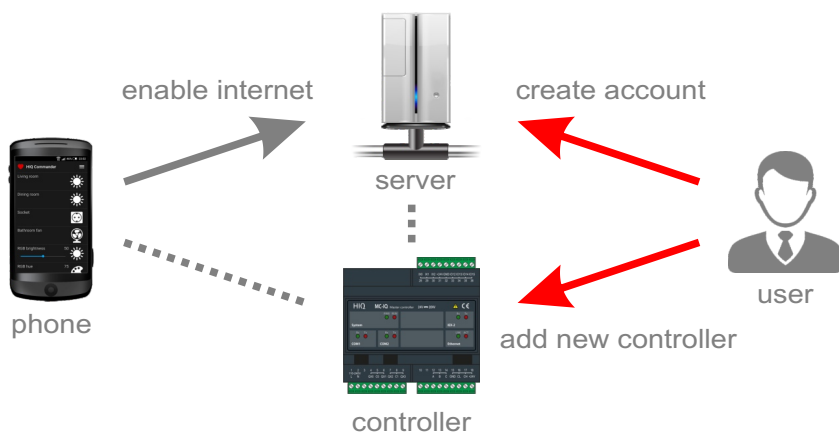


HIQ server is used for double purpose, remote access and user account. Remote access is automatically created with autodetect command. User account is created by registering on my.hiq-home.com, it allows management of connected controllers and phones.

Account management

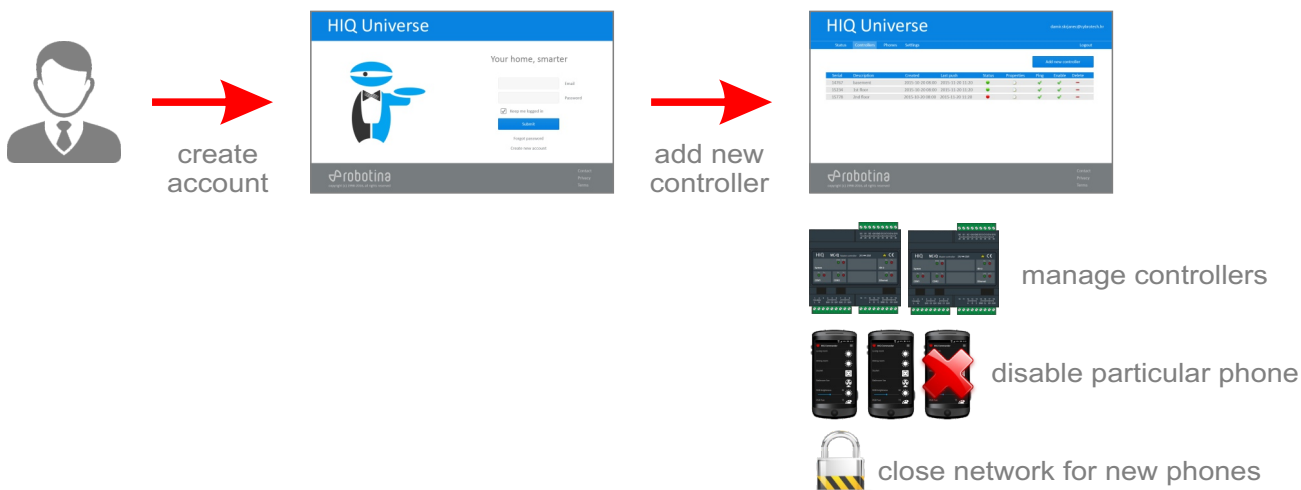


PS-IQ power supply

24V power source for the whole system

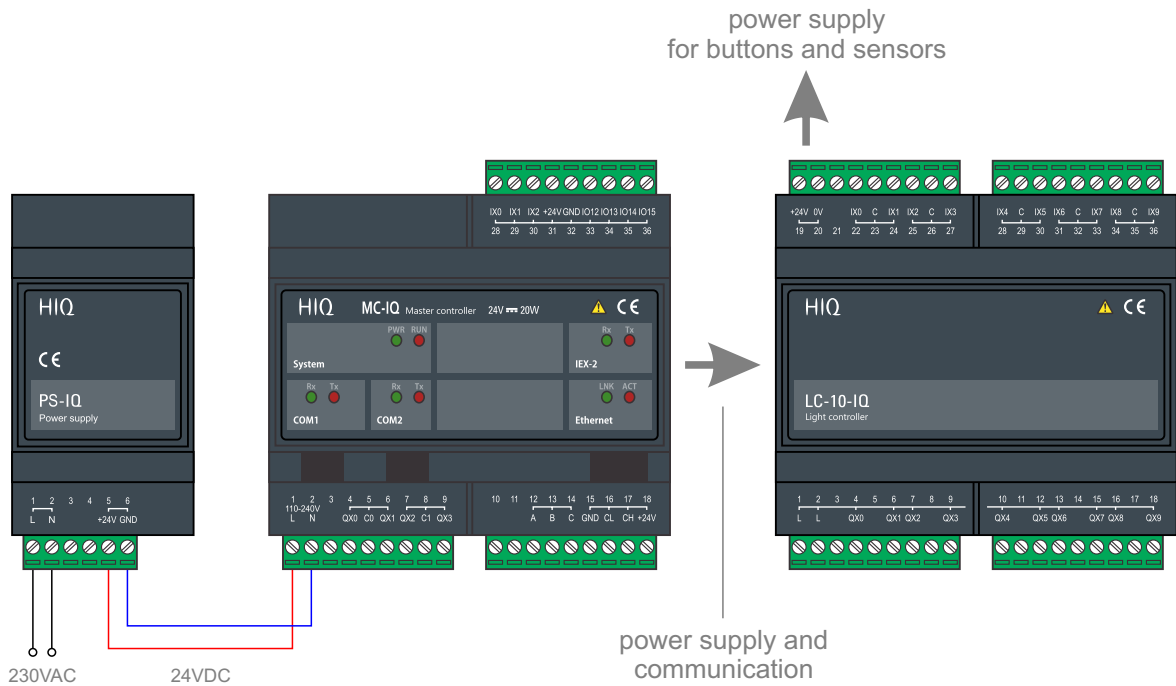


Secondary power supply

manual switching

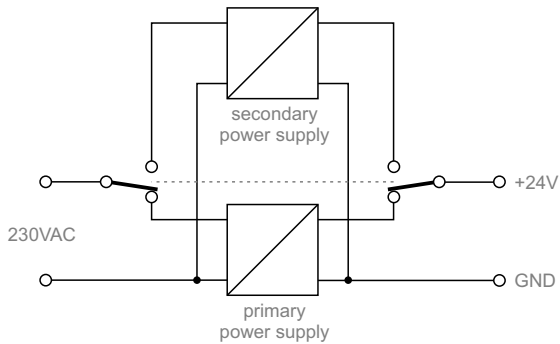

automatic switching

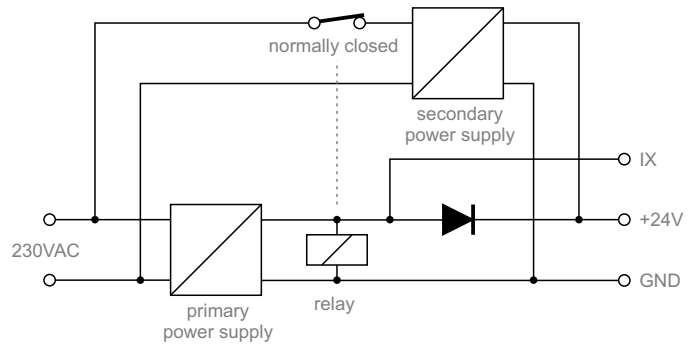


In case of primary power supply failure, secondary supply is used to ensure uninterrupted operation. Switching to secondary power may be manual or automatic. In case of automatic switching, a spare input (ix) is used to indicate the failure.

Technical specifications

Input:	100..240Vac, 50/60Hz
Output:	24V 2A (50W)
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Mounting:	DIN rail






MC-IQ master controller

home automation central unit

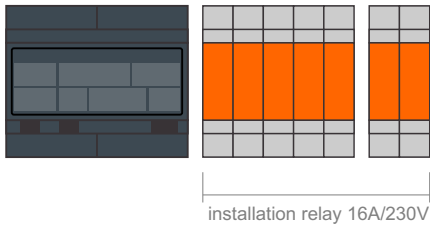

- QX0 - radiator 0
- QX1 - radiator 1
- QX2 - radiator 2
- QX3 - radiator 3
- QX4 - radiator 4
- QX5
- QX6 - boiler
- QX7 - chiller

Mounting: 35mm DIN rail 6M

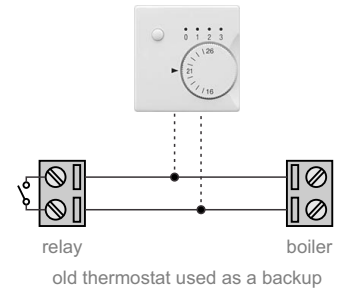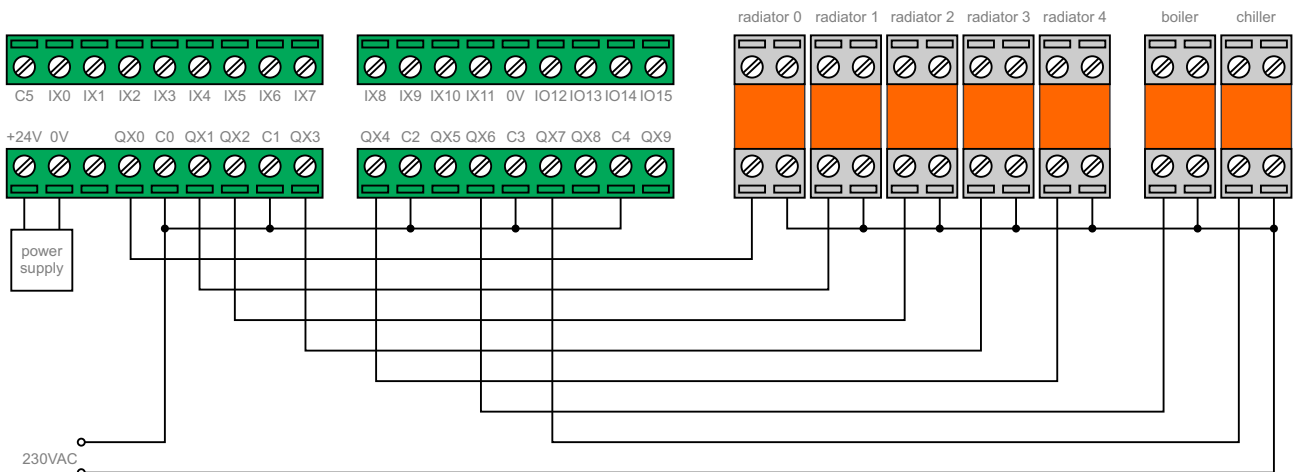

Features

- smartphone connection
- alarm
- HVAC
- timetable
- automation
- scene link
- internet connection



When load per channel is greater than specified, additional installation relay must be used.

Technical specifications






Output type:	8A/250V resistive load
Continuous load:	6A each relay 10A common terminal 25A all relays
Communication:	Ethernet 100M
Power supply:	24V 50..180mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Mounting:	DIN rail
Dimensions:	106x108x58mm
Weight:	280g
Standards:	EN 60730-1

LC-10-IQ light controller

10 relay outputs



Mounting: 35mm DIN rail 6M

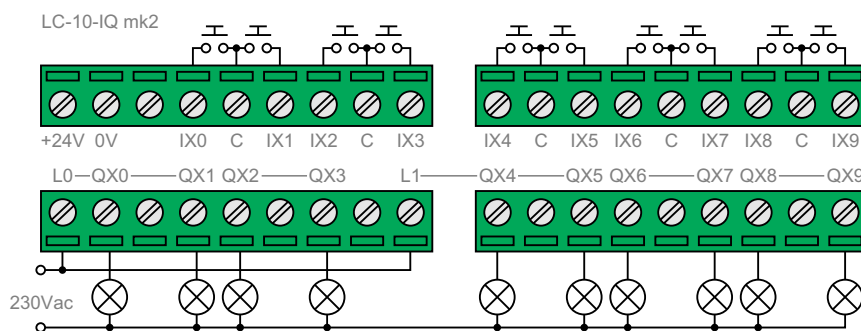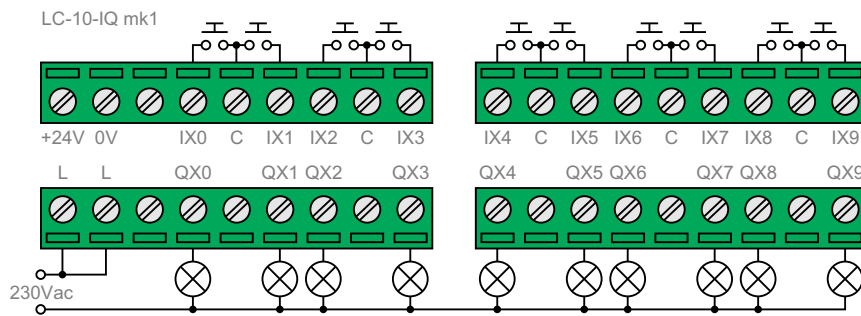

Features


8A nominal output current

power outage:
 <10min - lights come back
 >10min - lights will stay off



managed socket
 for devices such as dehumidifier,
 hi-fi system, floor lamp, portable
 fan, electric mosquito repellent...

Output mode

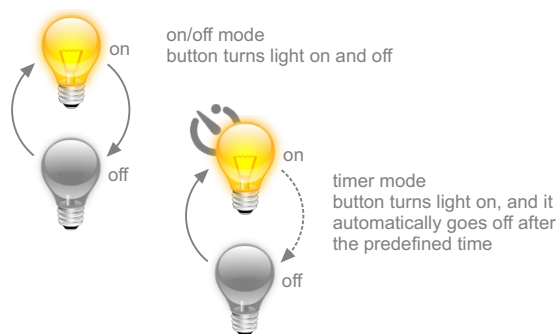

Circuit protection

6A MCB (miniature circuit breaker) type B is recommended.

mk1 (1x10): When total power of all channels is less than 1400W, a single 6A MCB is connected to both L terminals. Otherwise each channel should have a separate 6A MCB.

mk2 (4+6): When total power of each group is less than 1400W, two 6A MCBs are connected to terminals L0 and L1. Otherwise each channel should have a separate 6A MCB.

Managed socket should always have a separate 6A MCB. Each output must be connected to a single socket. Socket must have a noticeably different front plate with the label: "Caution: 1400W max".

Input mode



Input mode define how an input affect the output. Toggle, staircase, doorbell, motion and door sensor are handled internally. Scene and ready light are handled by master controller.

Technical specifications





Output power per relay:	
- LED with transformer or compact	400W
- halogen 12V with transformer	400W
- incandescent / halogen 230V	800W
- fluorescent with electronic ballast	400W
- parallel compensated fluo lamps	250W/30uF
- electric heater or any resistive load	1400W
Total output power all channels (mk1):	4000W
Total output power per group (mk2):	2800W
Maximum switching voltage:	250Vac
Dielectric strength output to output:	400Vac
Expected contact life:	20000 (100% load) 100000 (50% load)
Maximum length of input cable:	50m
Power supply:	24V 120mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	106x108x58mm
Weight:	280g
Standards:	EN 60730-1

LC-8-IQ light controller


8 relay outputs with parallel option



Mounting: 35mm DIN rail 6M

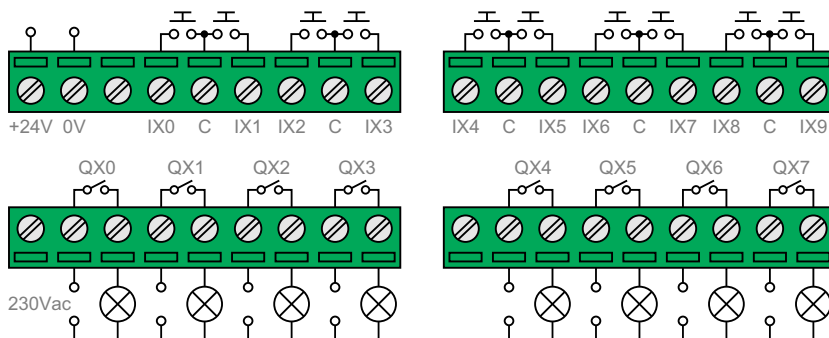

Output mode

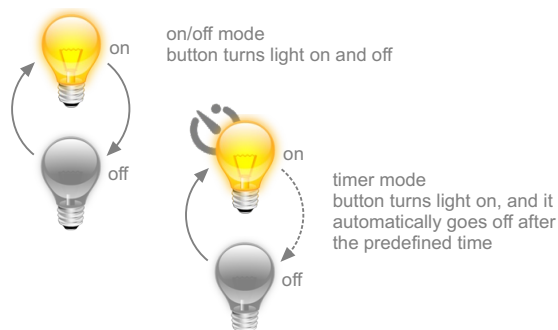


Input mode



Input mode defines how an input controls the output. Toggle, staircase, doorbell, motion and door sensor are handled internally. Scene and ready light are handled by master controller.

Parallel outputs

For maximum power, two outputs can be connected in parallel. Fully synchronous operation is ensured by firmware.



Features

- 10A** nominal output current
- 16A** nominal current for parallel outputs

power outage:
 <10min - lights come back
 >10min - lights will stay off



managed socket for devices such as dehumidifier, hi-fi system, floor lamp, portable fan, electric mosquito repellent, electric heater...

Circuit protection

8A MCB (miniature circuit breaker) type B is recommended.

When total power is less than 1800W, one 8A MCBs may be used for more outputs. When total power is greater than 1800W, each channel must have a separate 8A MCB. When outputs are connected in parallel, 12A MCB is recommended.

Managed socket should have a separate 8A (single) or 12A (parallel) MCB. Each output must be connected to a single socket. Socket must have a noticeably different front with the label: "Caution: 1800W max" or "Caution: 2800W max".

Technical specifications







Output power per relay:	
- LED with transformer or compact	400W
- halogen 12V with transformer	400W
- incandescent / halogen 230V	800W
- fluorescent with electronic ballast	400W
- parallel compensated fluo lamps	250W/30uF
- electric heater or any resistive load	1400W
Total power for parallel outputs:	2500W
Total power for all outputs together:	4000W
Maximum switching voltage:	250Vac
Dielectric strength output to output:	400Vac
Expected contact life:	20000 (100% load) 100000 (50% load)
Maximum length of input cable:	50m
Power supply:	24V 120mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	106x108x58mm
Weight:	280g
Standards:	EN 60730-1

LD-D8-IQ DALI dimmer


8-channel dimmer for DALI ballasts

Features


- 8x  control 8 independent groups
- 64x  drive up to 64 individual ballasts
-  internal DALI current source, no additional power needed

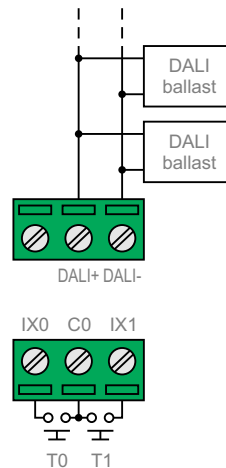

Mounting: DIN rail 2M



Operation

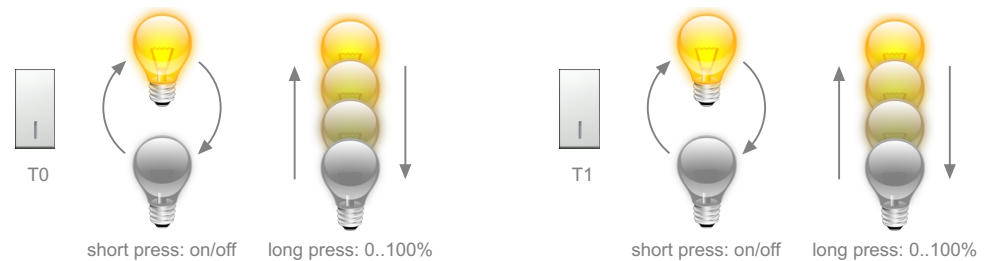

Groups 3 to 8 don't have physical input, so they can't be controlled directly, only as a scene or with a phone.

Ballast configuration



Configure ballasts into groups 1 to 8. LD-D8-IQ can't control individual ballasts.

Output options



Technical specifications





Digital inputs:	internal pull-up 12V, 2mA
DALI output:	200mA, up to 64 ballasts
Power supply:	24V 120mA
Galvanic separation:	none, ballasts must be SELV
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	36x108x58mm
Weight:	80g
Standards:	EN 60730-1

LD-V4-IQ LED dimmer

4-channel constant voltage dimmer for LED stripes



Mounting: junction box or drywall

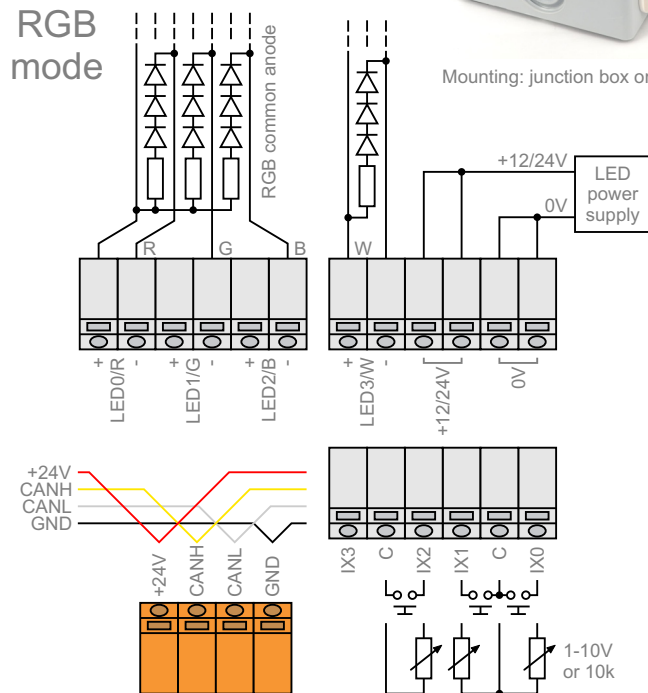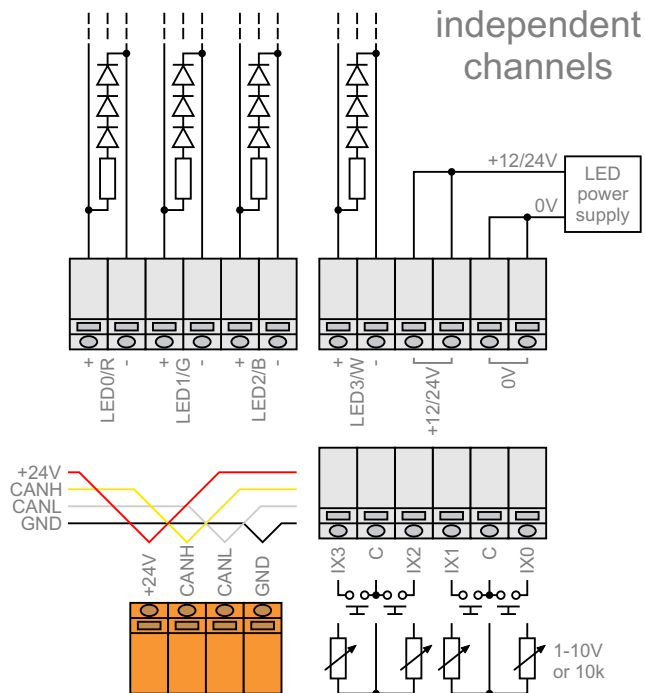

Features



RGB mode
hue, saturation, brightness
instead of individual RGB




white temperature mode
adjust hue in range from
warm white to cold white


button or potentiometer input:
- autodetect input mode
- mixed controls possible
- potentiometer auto-range



S-shaped on/off curve:
- soft start and landing
- fast and slow mode
- reduce electric noise



exponential output curve:
- natural feeling
- lowest level is 0.025%
- smooth transition



500Hz

high frequency PWM:
- no flickering
- avoid headache
- reduce eye-strain


output protection:
- overcurrent
- overvoltage
- undervoltage
- watch-dog



power outage:
<10min - lights come back
>10min - lights will stay off

maximum current	
output	supply
1x10A	1x10A
2x10A	2x10A
3x6.7A	2x10A
4x5A	2x10A

Operation

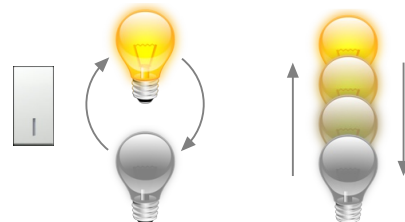

short press: on/off

long press: 0..100%


Technical specifications




LED power supply:	12/24V (10..28V)
Total output power:	240W at 12V 480W at 24V
Max current per terminal:	10A
PWM frequency:	500Hz
Output resolution:	12-bit
Power supply:	24V 25mA
Galvanic separation:	supply/outputs
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	108x86x46mm
Weight:	160g
Standards:	EN 60730-1

LD-P4-IQ universal dimmer

4-channel dimmer with a separate power driver

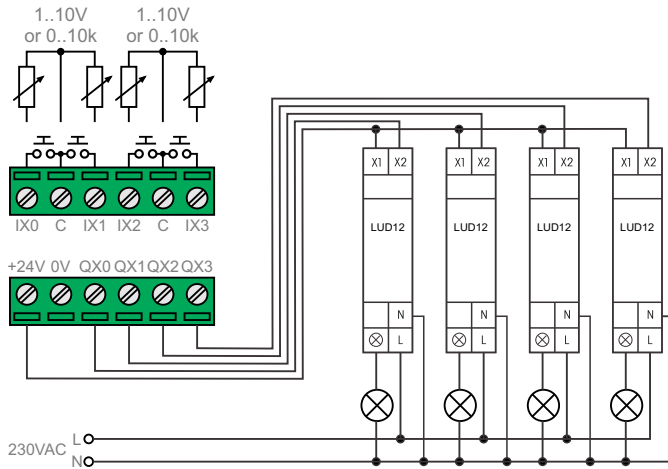

Mounting: 35mm DIN rail 2M + 4x1M



Features




RGB mode
hue, saturation, brightness
instead of individual RGB



white temperature mode
adjust hue in range from
warm white to cold white

button or potentiometer input:
- autodetect input mode
- mixed controls possible
- potentiometer auto-range




power outage:
<10min - lights come back
>10min - lights will stay off




- automatic load detection
- low noise zero switching
- electronic overload protection
- overtemperature shutdown

Operation

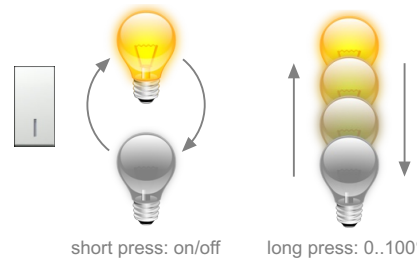

Driver rotary switch



switch must be
adjusted to the
indicated position

Output options




incandescent/halogen



compact LED E27/E14



compact fluorescent

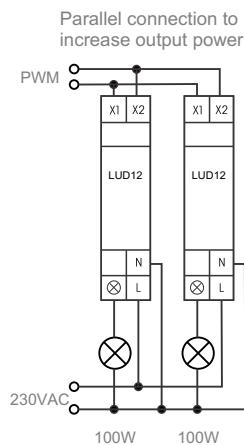


Technical specifications




Lamp power supply:	230V
Output power per driver:	100W
Drivers per output channel:	1..10
Driver control signal:	PWM 100Hz 24V
Power supply:	24V 25mA
Galvanic separation:	supply/outputs
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	36x108x58mm
Weight:	80g
Standards:	EN 60730-1

BC-5-IQ blinds controller


5-channel blinds position controller

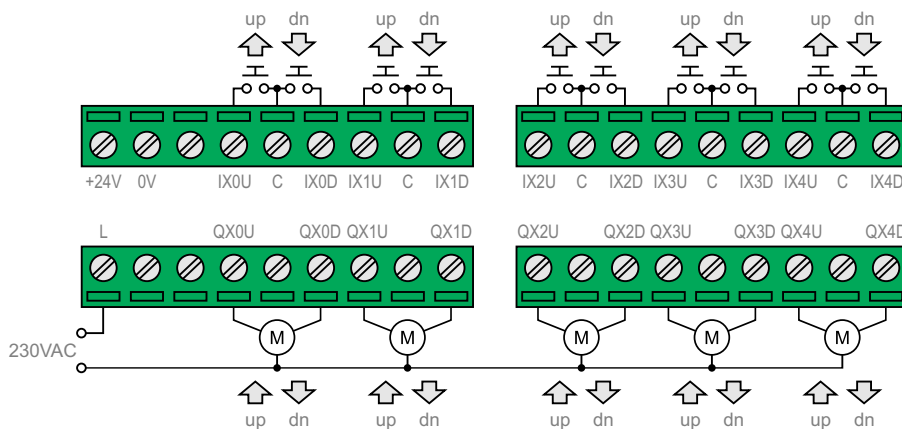

Mounting: 35mm DIN rail 6M



Features



short press: move up/down



short press while moving: stop at the position



long press: stop after released



short press: move to intermediate position



automatic position related to scene



up and down button



automatic correction at boundary position

Travel time adjustment

1. Adjust top and bottom limit switch (electrician).
2. Use stopwatch to measure travel time in both directions.
3. Use HIQ Configurator to enter measured values.
4. Check accuracy: move blinds to 50%, mark position. Move blinds about half way up and down, few times, without reaching the top or bottom. Move to 50% again. If the actual position is above the mark, slightly increase down time. Below the mark, increase up time. Repeat until positioning is perfect.


Technical specifications






Output power per relay:	200W
Total output power (all relays):	2000W
Maximum input cable length:	50m
Power supply:	24V 60mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	106x108x58mm
Weight:	250g
Standards:	EN 60730-1

SC-4-IQ scene controller


4-button universal scene controller



Mounting: rectangular box 3M



Panel layout

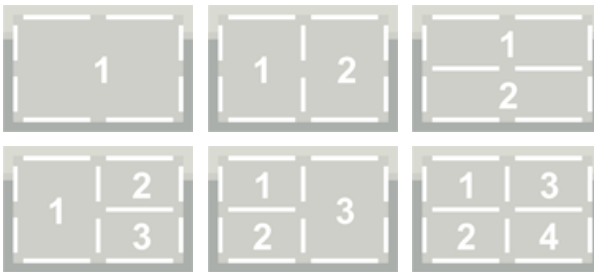


Select between possible key configurations

Button action



Select a function for each key. Blinds can be controlled with a single-button and two-button configuration.

Inverse scene



second press force all lights to off, blinds are not changed

Memorize scene



long press, confirmed by beep, store current state as a new scene

Technical specifications






IR remote receiver:	RC5 36kHz
Power supply:	24V 25mA (SC-4T) 24V 35mA (SC-4S)
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	122x80x23mm (SC-4T) 49x49x7mm (SC-4S)
Weight:	80g (SC-4T) 20g (SC-4S)
Standards:	EN 60730-1

TH-1-IQ thermostat





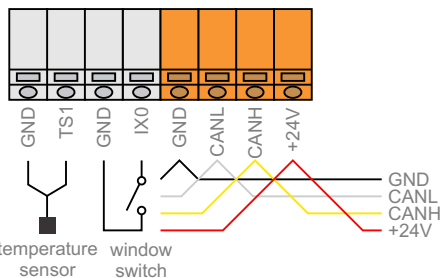



electronic thermostat







Mounting: rectangular box 3M



Features

-  on/off
-  setpoint
-  fan control
-  fan max
maximum output for a limited time
-  secondary setpoint when thermostat is off
-  manual measurement correction
-  window switch
shut down heating when window is open
-  night mode
attenuate display during the night

Fan options

-  fan speed 0 or 1
-  fan speed 0, 1 or 2
-  fan speed 0, 1, 2 or 3
-  maximum output for a limited time

Display when on

-  measured temperature
-  setpoint temperature
-  fan speed

Display when off


-  off
-  dashes
-  temperature

Temperature sensor



Remote means temperature is taken from another device

Temperature offset

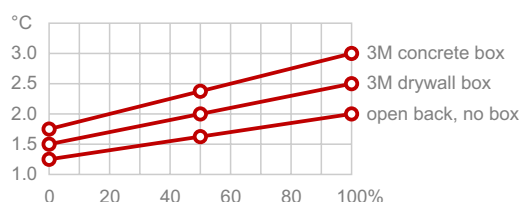

Recommended temperature offset vs. lightness and mounting type

Technical specifications




Window switch input:	internal pull-up 12V, 2mA
Temperature measurement:	internal or external
External temperature sensor:	ES any model
Power supply:	24V 15mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	122x80x23mm
Weight:	80g
Standards:	EN 60730-1

TH-2-IQ thermostat

electronic thermostat





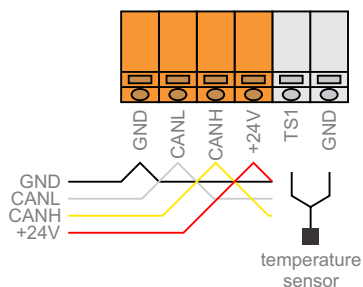





Mounting: on wall



LED indicator

- device selected (white)
- setpoint increased (red blink)
- setpoint decreased (blue blink)


Features

-  on/off
-  setpoint
-  fan control
-  fan max
maximum output for a limited time
-  precise temperature measurement
-  manual measurement correction
-  secondary setpoint when thermostat is off
-  humidity meter



all functions handled by a mobile phone

Temperature sensor

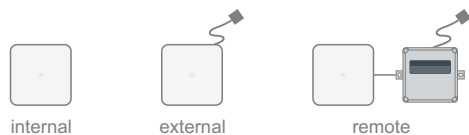

Remote means temperature is taken from another device


Technical specifications





Temperature measurement:	internal or external
External temperature sensor:	ES any model
Default offset:	-1.4°C
Humidity measurement:	internal, 0..100%rh
Power supply:	24V 10mA
Ingress protection:	IP20
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	71x71x27mm
Weight:	50g
Standards:	EN 60730-1

FC-1-IQ fan-coil actuator

3-speed fan coil actuator

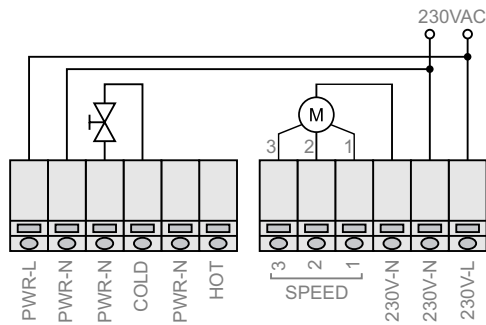

Mounting: inside fan-coil

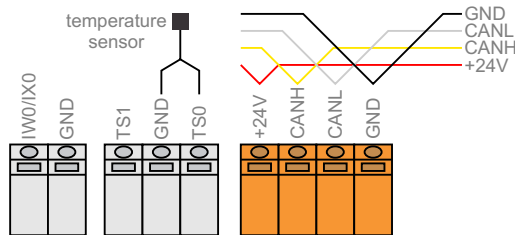

fan coil

- 2-pipe system
- electromechanical valve
- 3-speed fan
- both heating and cooling

Features

simple
no adjustments, no jumpers or DIP switches, configuration is completely performed on PC

flexible
can be used with a wide range of home, office and industrial convectors

fallback mode
device continue operation even in case that communication is broken

With heating, fan is delayed 60 seconds after valve, to prevent a blow of cool air. This delay is not implemented for cooling.



Technical specifications



Relay outputs:	3A/250V
Temperature measurement:	external
External temperature sensor:	ES any model
Power supply:	24V 45mA
Operating temperature:	0..45°C
Storage temperature:	-20..75°C
Relative humidity:	0..95% n/c
Dimensions:	108x86x46mm
Weight:	150g
Standards:	EN 60730-1

Power meter


voltage, power and energy

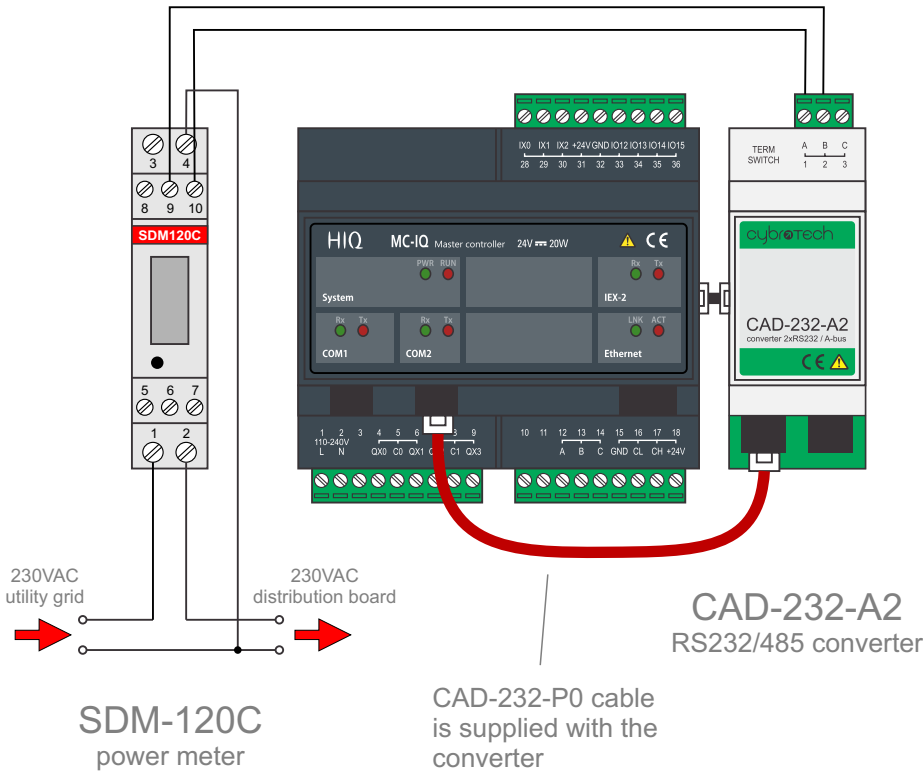

Mounting: 35mm DIN rail 1M + 2M



SDM120C



CAD-232-A2

Technical specifications




Nominal voltage:	230VAC, 110VAC
Voltage range:	77..300VAC
Maximum current:	45A
Operational frequency:	50..60Hz
Power consumption:	2W
Communication setup:	2400 8e1
Modbus address:	1
Communication cable:	CAD-232-P0
Ingress protection:	IP51
Operating temperature:	0..55°C
Storage temperature:	-20..75°C
Relative humidity:	85%
Dimensions:	119x17.5x62mm
Weight:	85g
Standards:	EN 60730-1

Motion and door sensor

sensors for automation and alarm




Motion sensor

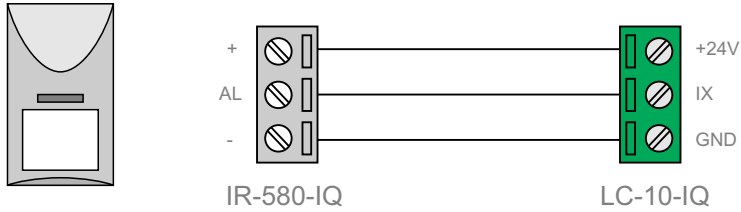

Motion sensor is mounted above or lateral to room entrance. People entering the room must intersect sensor beams. At the moment when closing the door, person should be in the area of maximum sensitivity.

Door sensor

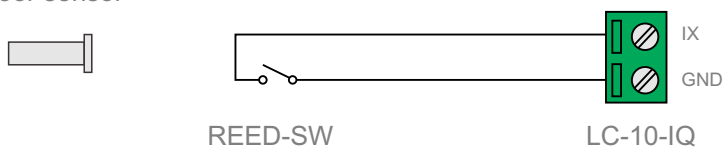


Door sensor is mounted on the knob side, usually about 20cm from the top. Magnet goes into the door, contact goes into the doorpost.

Sensors are connected to spare LC-10-IQ inputs. Input type must be configured as sensor input.

For a room with more doors, door sensors are connected in series (sensor is closed when door is closed), and motion sensors are connected in parallel.

Mounting

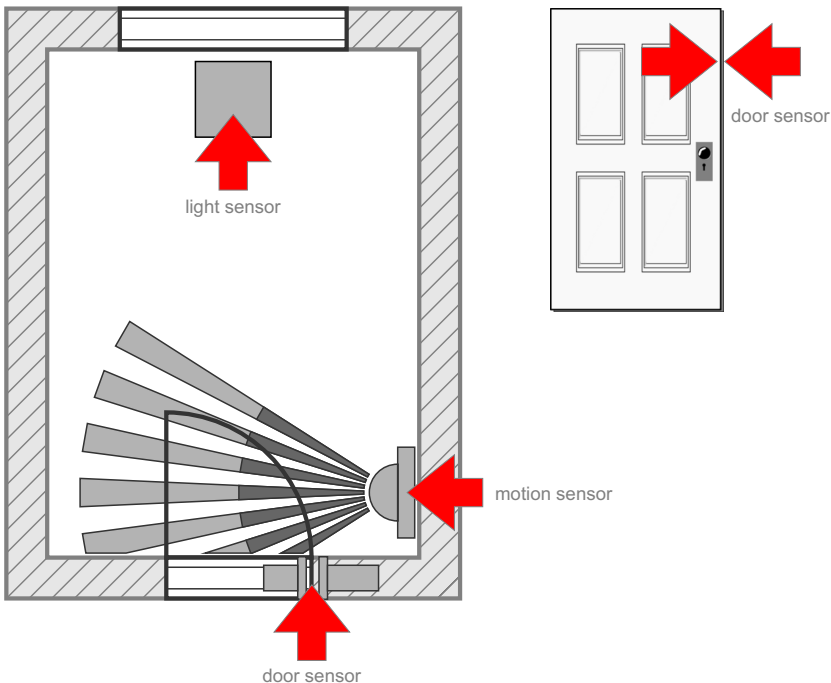

Technical specifications




Motion sensor	-
Output type:	NPN o.c. 75mA
Power supply:	24V 10mA
Operating temperature:	20..50°C
Storage temperature:	-20..75°C
Dimensions:	100x60x42mm
Weight:	85g
Door sensor	
Switch type:	reed switch, normally open
Dimensions:	25x7mm
Weight:	12g


Temperature sensor

indoor and outdoor measurement


ES-P



ES-B



ES-W




Technical specifications



ES-P	-
Housing:	heatshrink tube
Operating range:	-50 to +100°C
Degree of protection:	IP50
Cable length:	2m
ES-B	
Housing:	steel tube
Operating range:	-50 to +100°C
Degree of protection:	IP67
Cable length:	5m
ES-W	
Housing:	plastic box, white
Operating range:	0 to +50°C
Degree of protection:	IP20
Dimension:	71x71x27mm
Common	
Sensor type:	DS18B20 digital sensor
Accuracy:	±0.2°C typ. (-10 to +85°C) ±0.5°C max. (-10 to +85°C) ±2.0°C max. (-50 to +100°C)
Cable length:	20m max.
Recommended cable:	UTP 0.25..0.5mm ²

Wiring

Distribution board and field modules

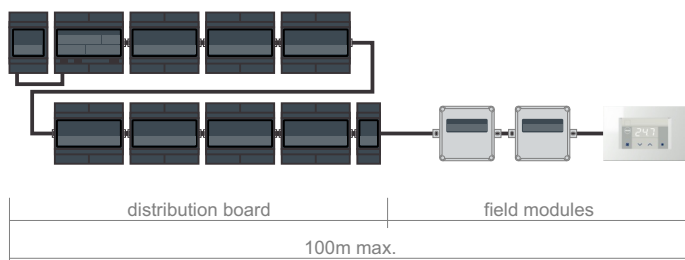

Power supply must be connected to the first (leftmost) device. When devices are connected, autoaddress procedure must be started using HIQ Configurator.


Devices inside distribution board are addressed sequentially, from left to right. Devices outside of distribution board (field modules) are addressed in order of ascending serial numbers - lowest serial number gets the first address, second lowest the second, and so on.

Inside distribution board, bus is connected with 4x flat cable and RJ9 connectors. Outside distribution board, bus is connected with a unshielded twisted-pair cable and orange push-wire terminals.


Maximum bus length is 100 meters. Up to that length, bus can be connected with no special rules, branching is allowed. Longer bus (up to 300m) is possible, but cable must be connected in line (no branches/trunks), and last device must be terminated with a 120ohm resistor between CANL and CANH.

Recommended bus cable


unshielded twisted pair 2x2 0.5mm²



Wire stripping



Push-wire handling



Solid wire insertion

1. Push wire in the clamp hole

Stranded wire insertion


1. Push screwdriver in the operating slot
2. Insert wire in the clamp hole

Solid/stranded wire removal

1. Push screwdriver in the operating slot
2. Remove wire

Bus wiring


1. Take one ingoing and one outgoing wire together, and remove insulation for about 10-12mm.




2. Crimp wires together into a ferrule.



3. Wrap wires together for a few centimeters.

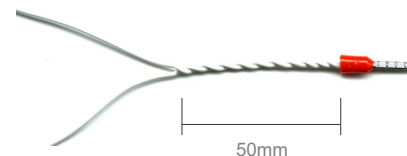


4. Push ferrules into clamps.

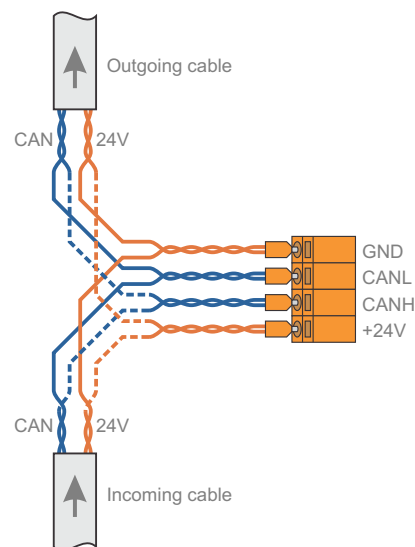

Wire type




Schematic diagram

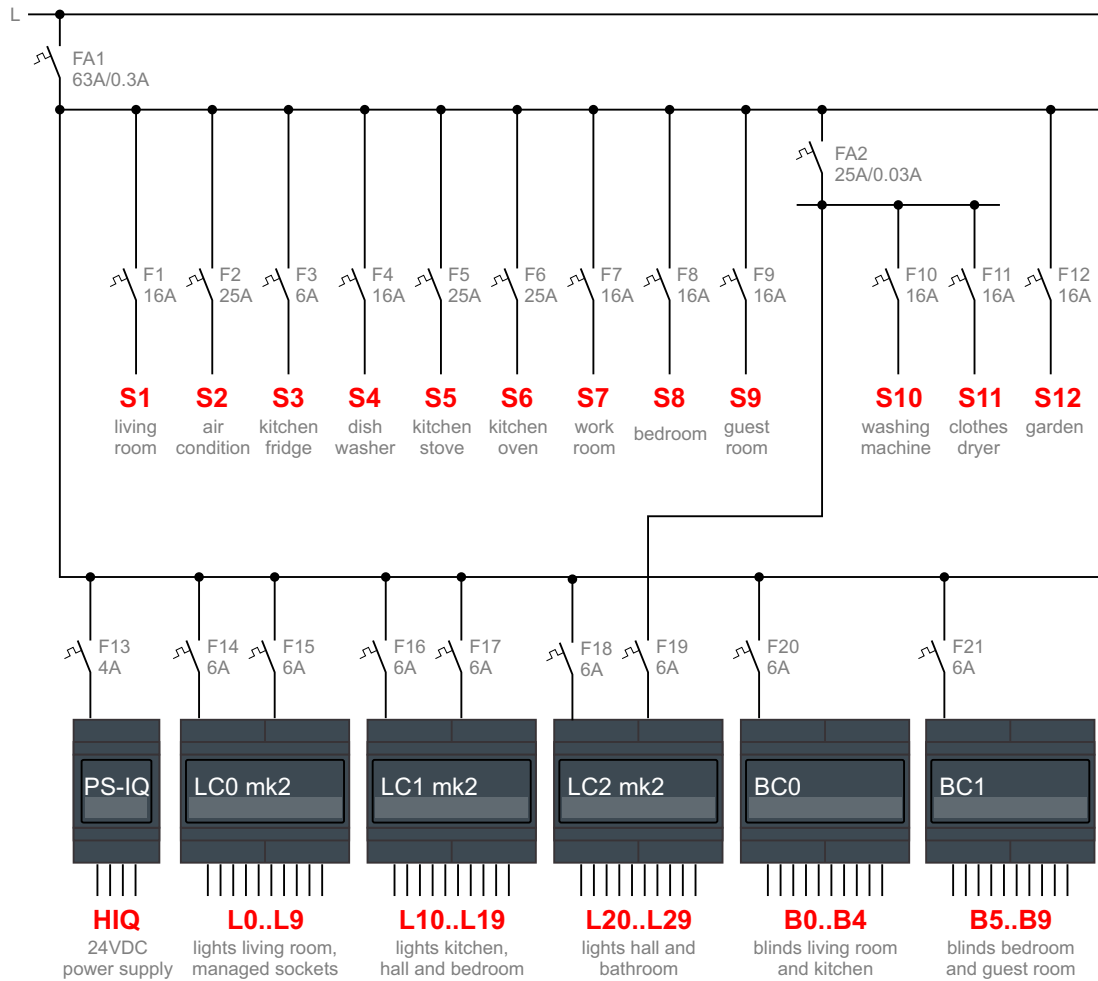




This is a typical schematic diagram for a 200m² family house. Circuits S1 to S12 are standard appliances and power sockets. Circuits L0 to L29 are lights and managed sockets. Circuits B0 to B9 are electric blinds. FA1 and FA2 are residual current switches. 24VDC is power supply for HIQ devices.

Distribution board

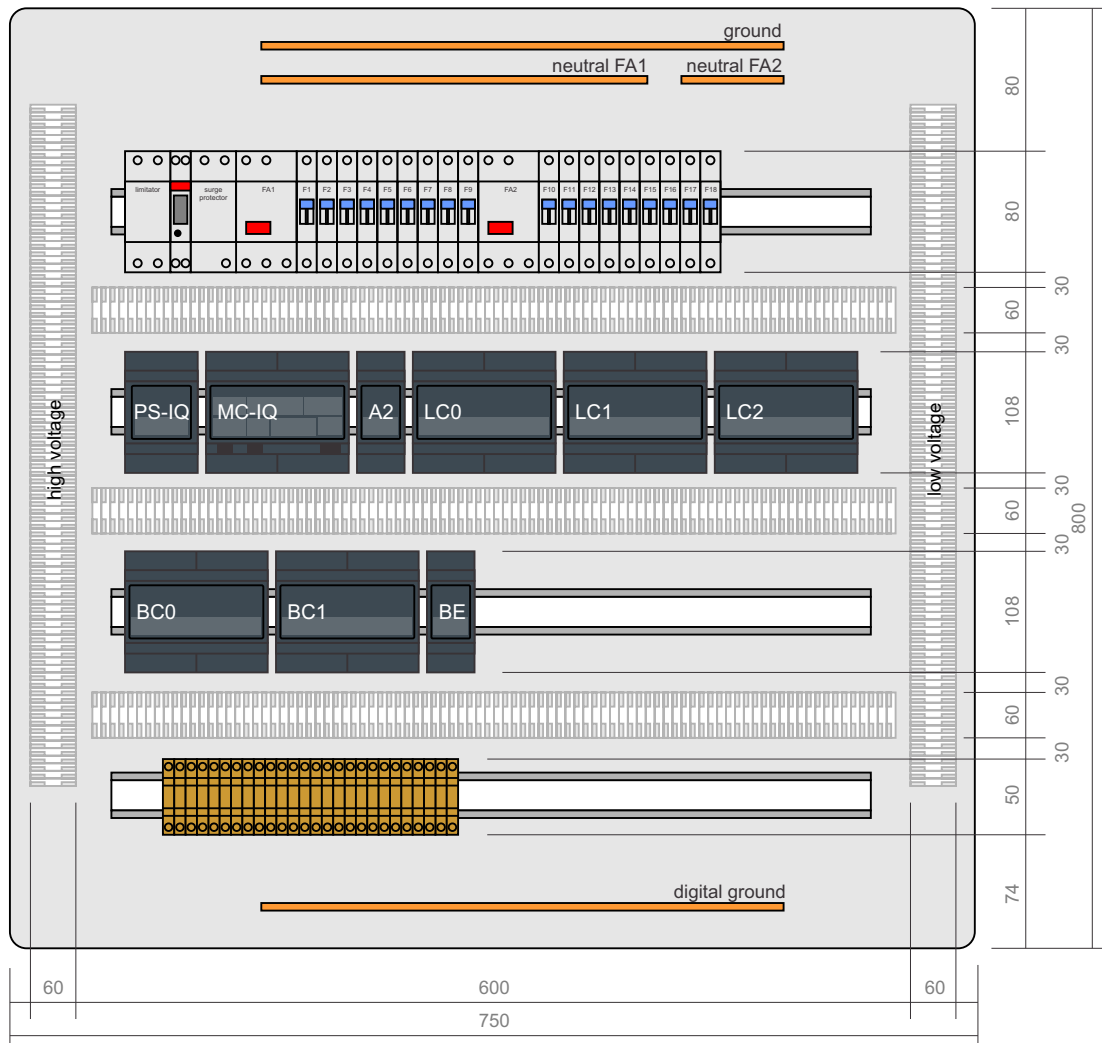

This diagram represents a typical distribution board layout. Four DIN rails are used, top row for fuses, next two rows for HIQ modules, and the last row for interconnecting terminals. Above and below are ground and neutral rails. Digital ground is a common rail for input switches and sensors. 30mm is recommended distance for handling terminals and wires.

Dimensions

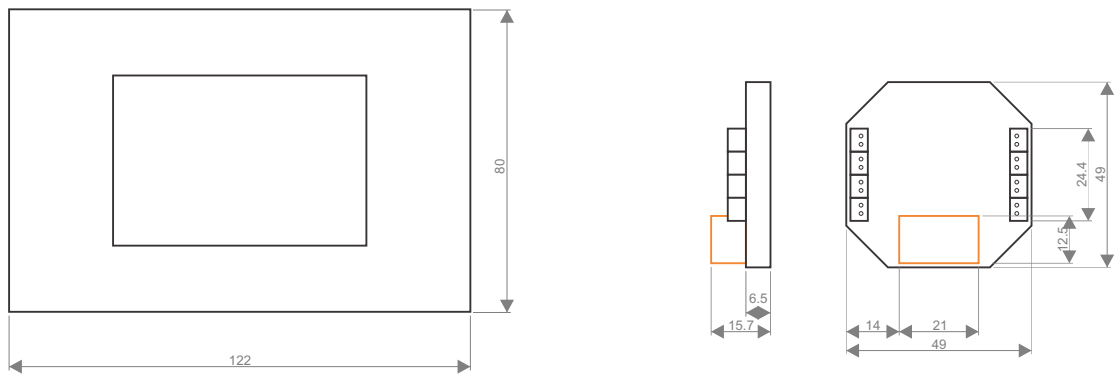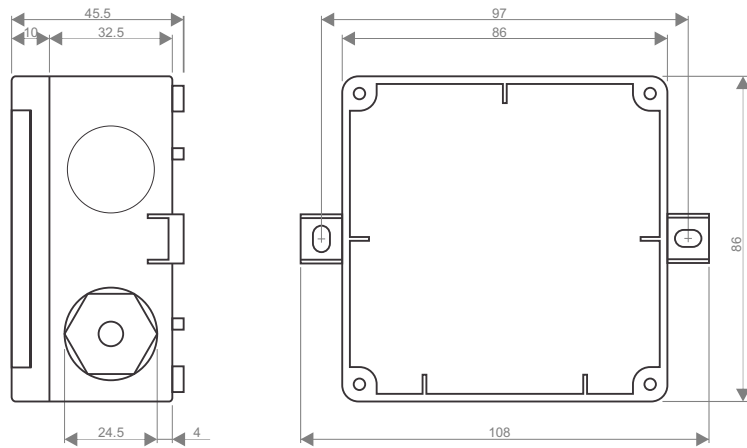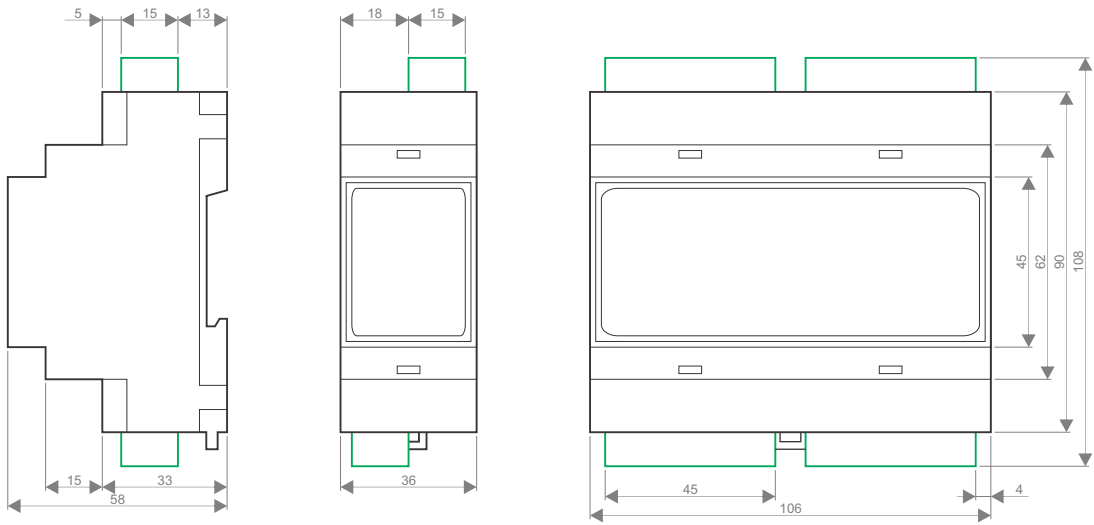

Order code


devices and sensors



LC-10-IQ
light controller
with 10 outputs



LD-D8-IQ
8-channel
DALI dimmer



LD-V4-IQ
4-channel
LED strip
dimmer



BC-5-IQ
5-channel
blinds controller




LD-P4-IQ
4-channel
universal dimmer
LUD-12
power driver




SC-4T-IQ
touch screen
scene controller



TH-1T-IQ
thermostat with
touch buttons



TH-2-IQ
blind thermostat



FC-1-IQ
fan-coil
actuator



MC-IQ
master controller



PS-IQ
power supply 24V




BE-PROT
bus adapter +
surge protector



IR-580-IQ
motion sensor



REED-SW
door sensor



SDM120C
power meter

CAD-232-A2
232/485 converter
(including cable)

Order code

cables and accessories

